



PONSBE BESSE

ELEPHANT

3-1000





KOMATSU

MODERN MACHINERY

WA320



KOMATSU

WA 320

CW15



WA 250 PZ

KOMATSU  
ROLAND

Firestone



My HA  
A  
as



MW HAPPY







**DANGER**  
HIGH

ON  
OFF  
OPEN

START PUMP  
START HEAD





ALLEN-LEWIS  
INDUSTRIES, INC.  
BRONZE STAR

BARNETT  
STAR



Skidmark

ed-  
stiff, Inc.  
INZE STAR








ARKO  
Build sheets

Hydrotex

HIT

Red Bull

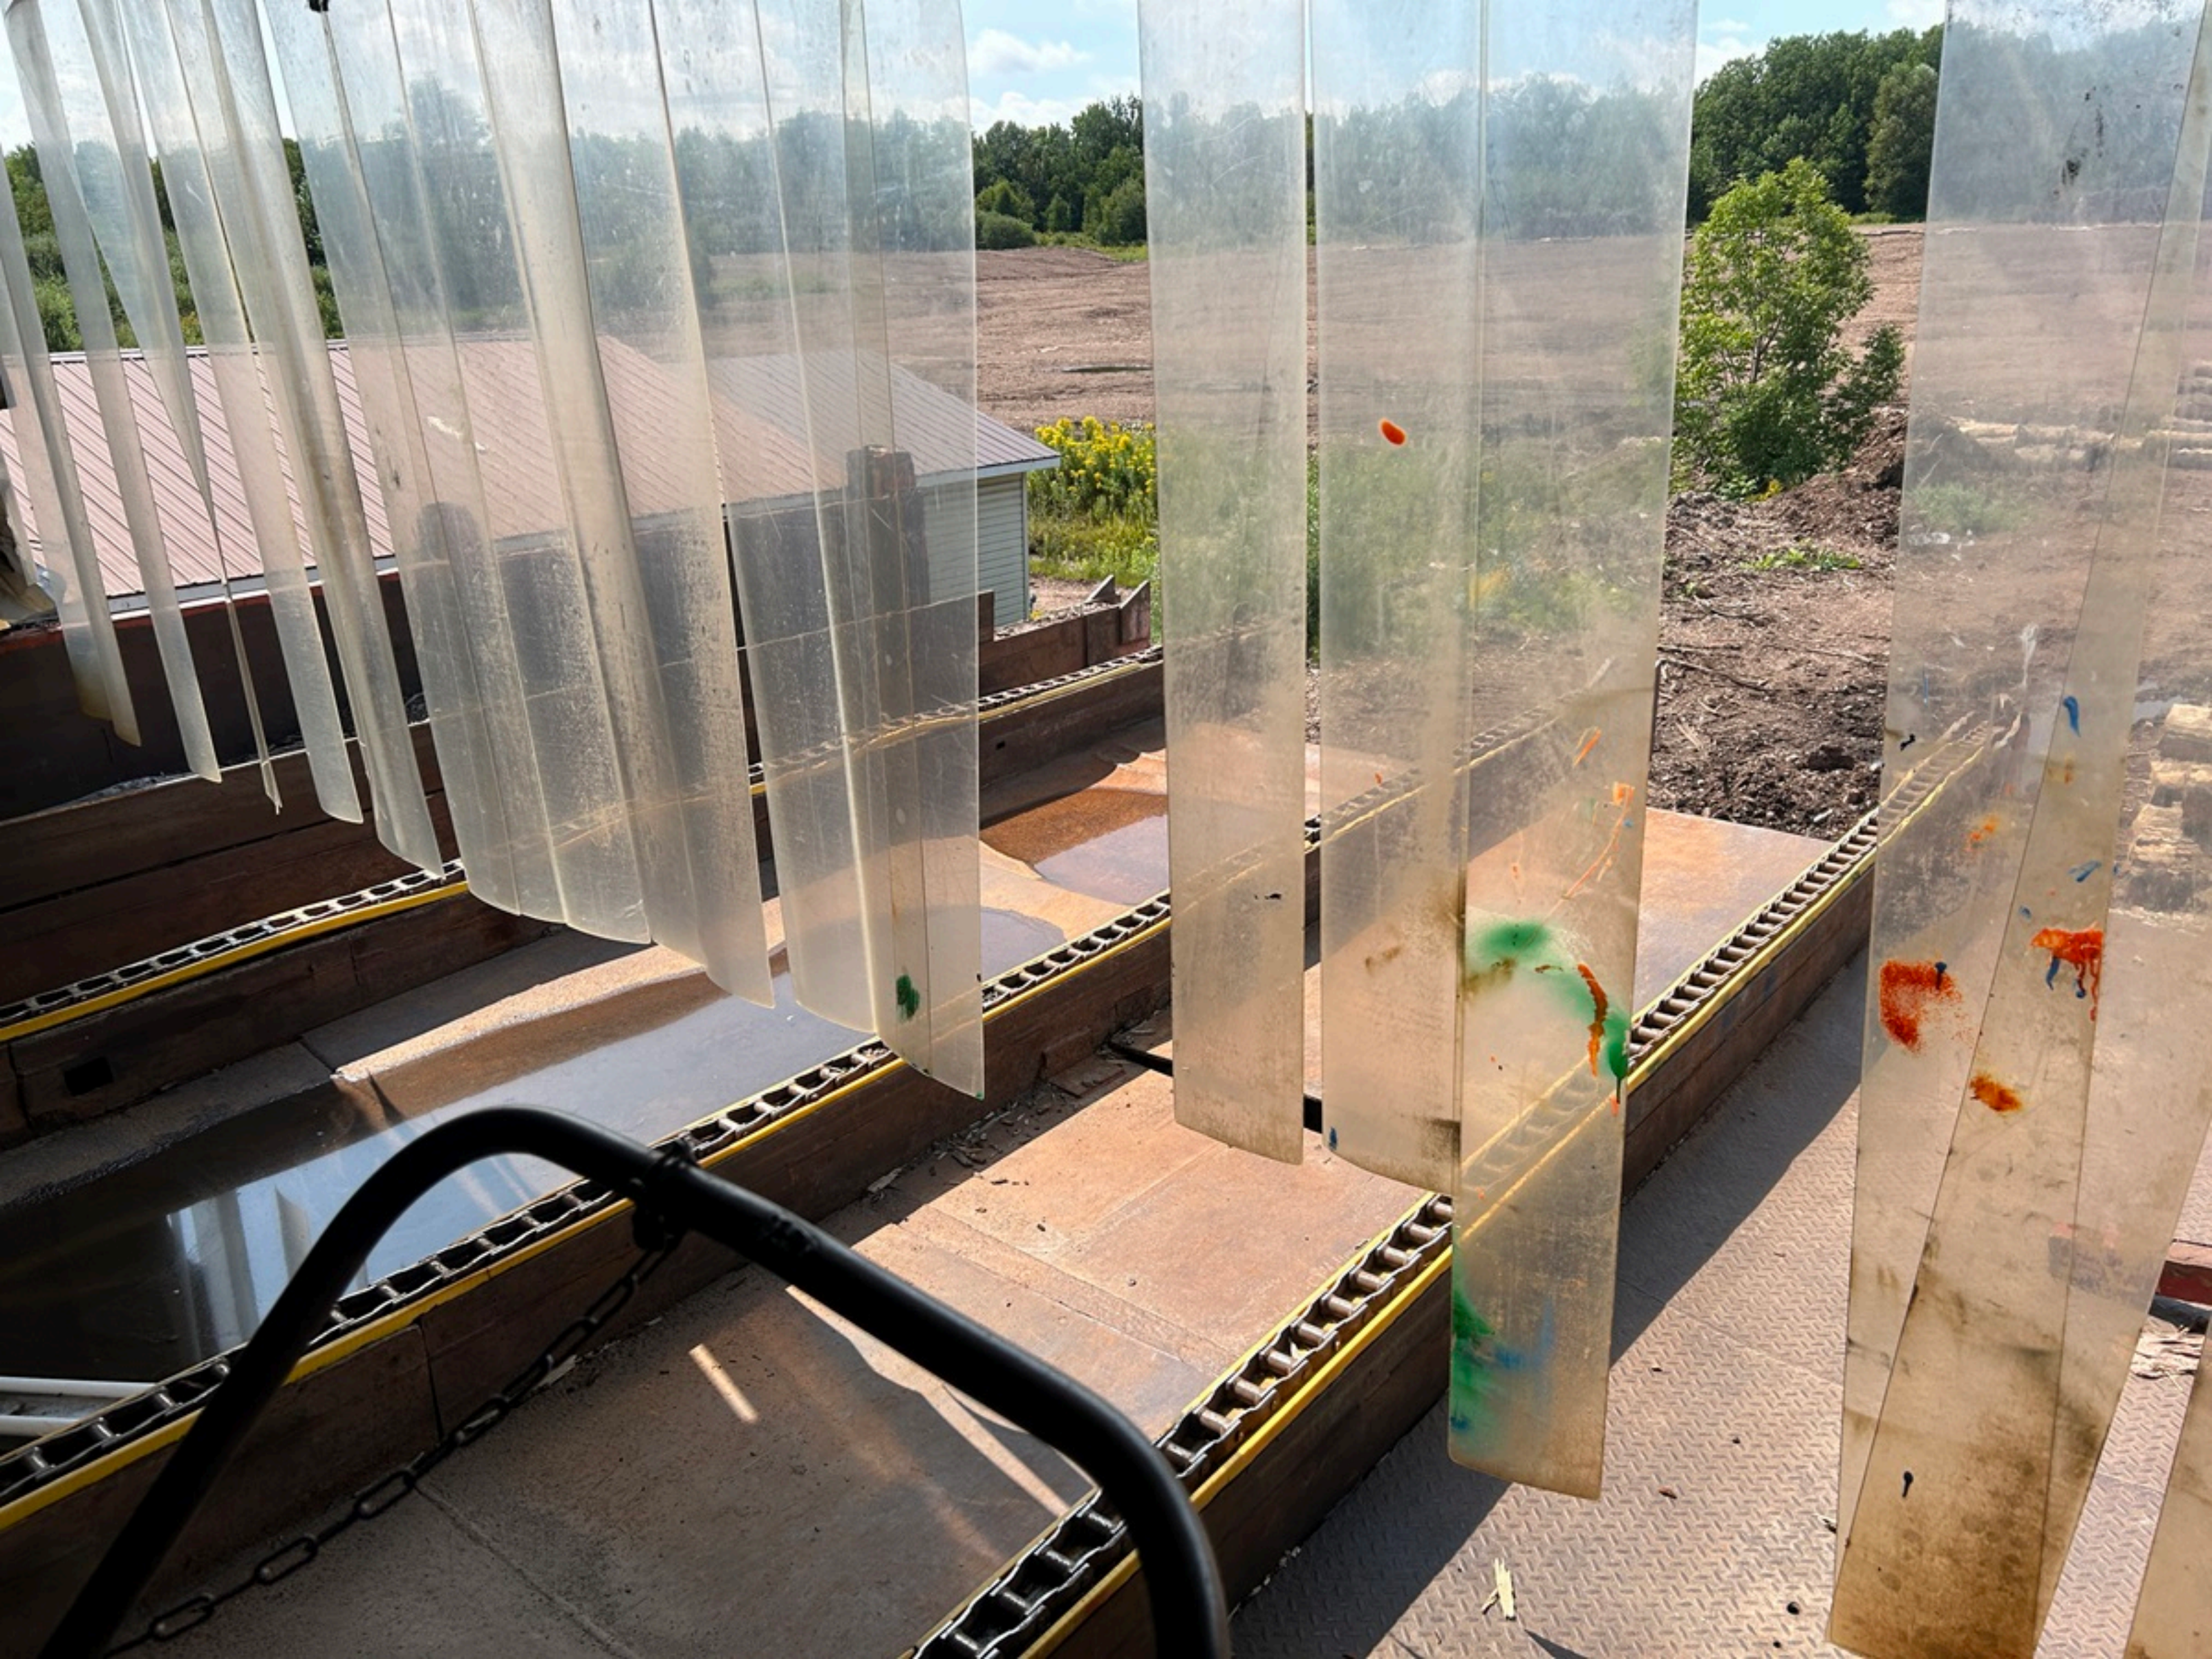































Electrical control cabinet with the HMC logo (a triangle with an upward-pointing arrow) and the letters 'HMC' below it. The cabinet is grey and has several warning labels on top.

Large green vertical machine with the name 'McDONOUGH' embossed in a stylized font at the top. Below the name is a white document on a yellow clipboard. The machine has a horizontal opening at the top where a material is being processed.

Yellow safety railings consisting of horizontal bars and vertical posts, attached to a grey vertical structure on the right side of the image.



Control panel with various knobs, buttons, and a green emergency stop button.



Large touchscreen display showing a control interface with a table of data and function buttons.

21.59/64	0	0
0.10	0	0
2.100	0	0
1.50	0	0
1.50	0	0
1	0	0

Buttons: Stop (Yellow), Clear (Red), Back (Black), Run (Green)







**HMC**  
**Corporation**

CONTOOCOOK N.H. U.S.A.

MODEL M M 10 C


SERIAL NO. 287 84

**DANGER**

BEFORE STARTING TO OPERATE THIS EQUIPMENT BE SURE THAT THE OPERATOR AND ALL THOSE RESPONSIBLE FOR IT READ ALL INSTRUCTIONS FURNISHED WITH IT. POSITIVELY DO NOT OPERATE THIS EQUIPMENT WITHOUT SAFETY GUARDS COVERING ALL DRIVES AND DANGER AREAS. SINCE REQUIREMENTS WILL VARY WITH THE INDIVIDUAL THE OWNER OR USER MUST PROVIDE THE REQUIRED SAFETY





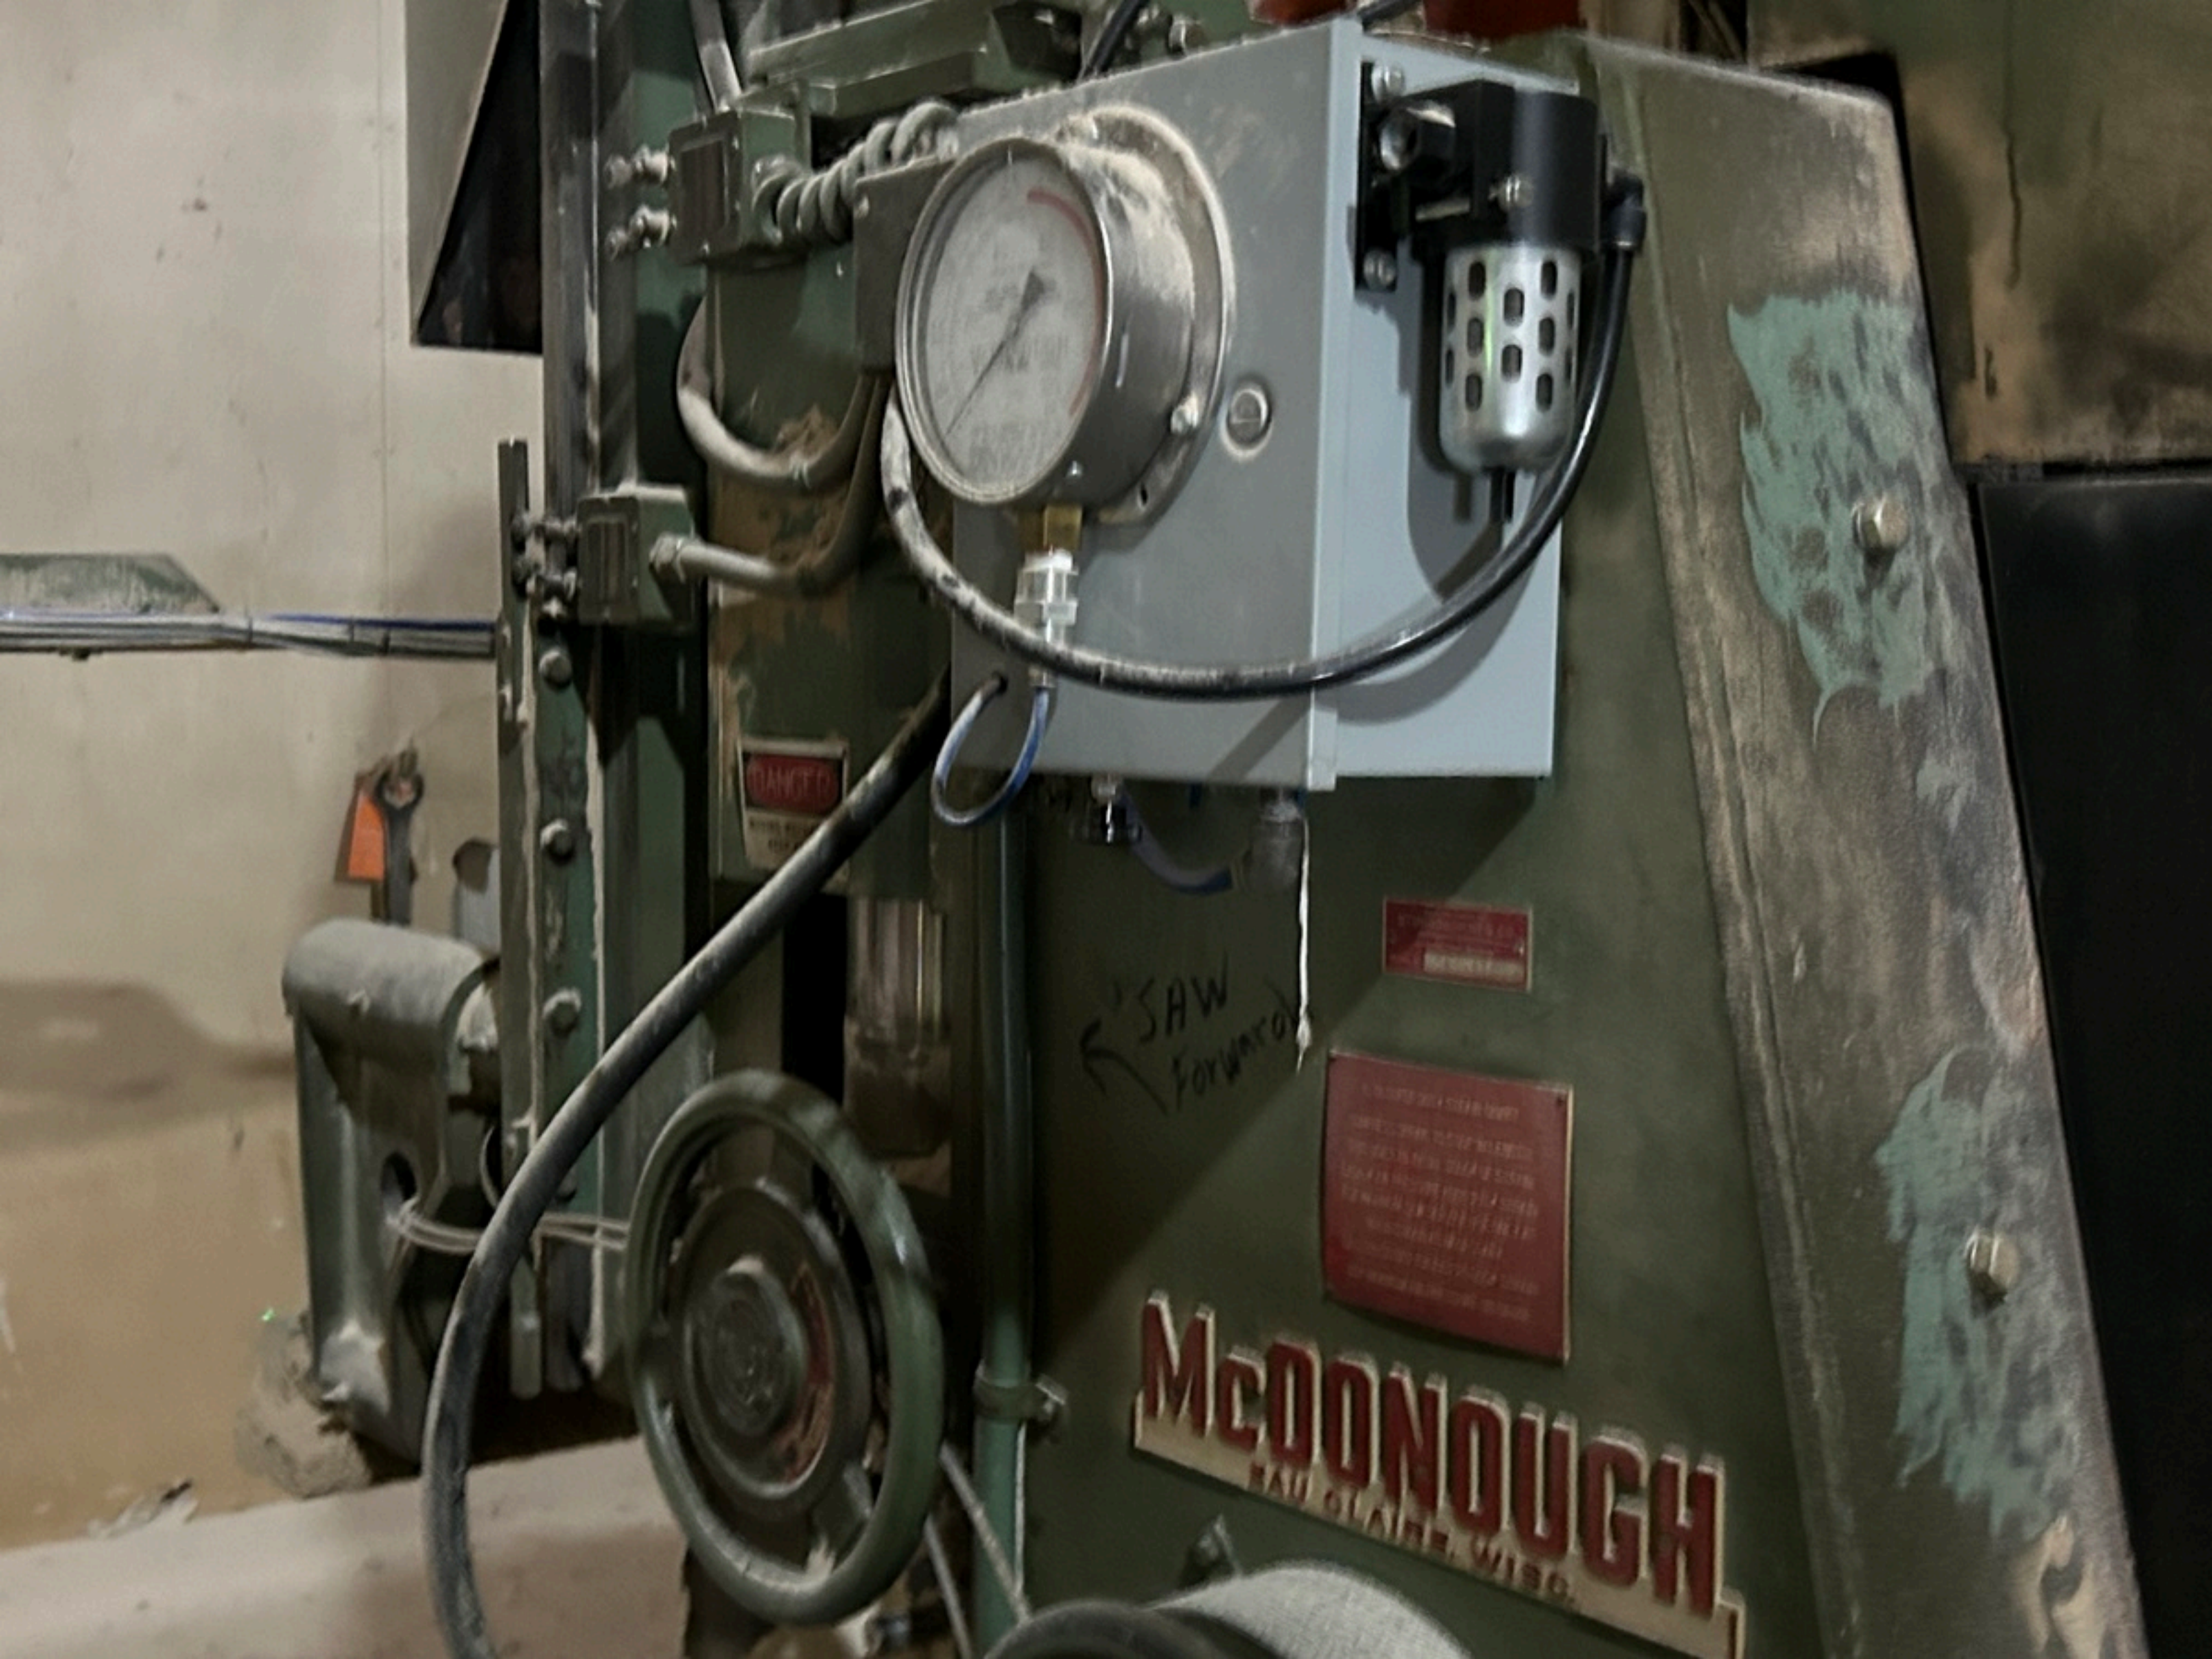

WARNING

SAW  
Forward

WARNING  
DO NOT OPERATE THIS MACHINE  
UNLESS YOU ARE TRAINED AND  
EXPERIENCED IN THE USE OF  
THIS MACHINE. ALWAYS WEAR  
YOUR SAFETY GEAR.  
McDONOUGH TOOL & DIE CO.  
MILWAUKEE, WIS.

**McDONOUGH**  
MILWAUKEE, WIS.

SAW  
Forward


1 1/2" SUPER DUTY STRAIN GAUGE  
COMPRESSOR TO 150 PSI LENGTH  
THE WHEELS IN THE REAR OF STRAIN  
GAGE FOR PRESSURE ADD 275 PSI STRAIN  
FOR WARMER AIR SERVICE USE ONLY AS  
NECESSARY  
DANGER DO NOT EXCEED 25,000 PSI STRAIN  
FOR WARMER AIR PRESSURE ON GAUGE

**MCDONOUGH**  
EAU CLAIRE, WISC.

CAUTION

UP



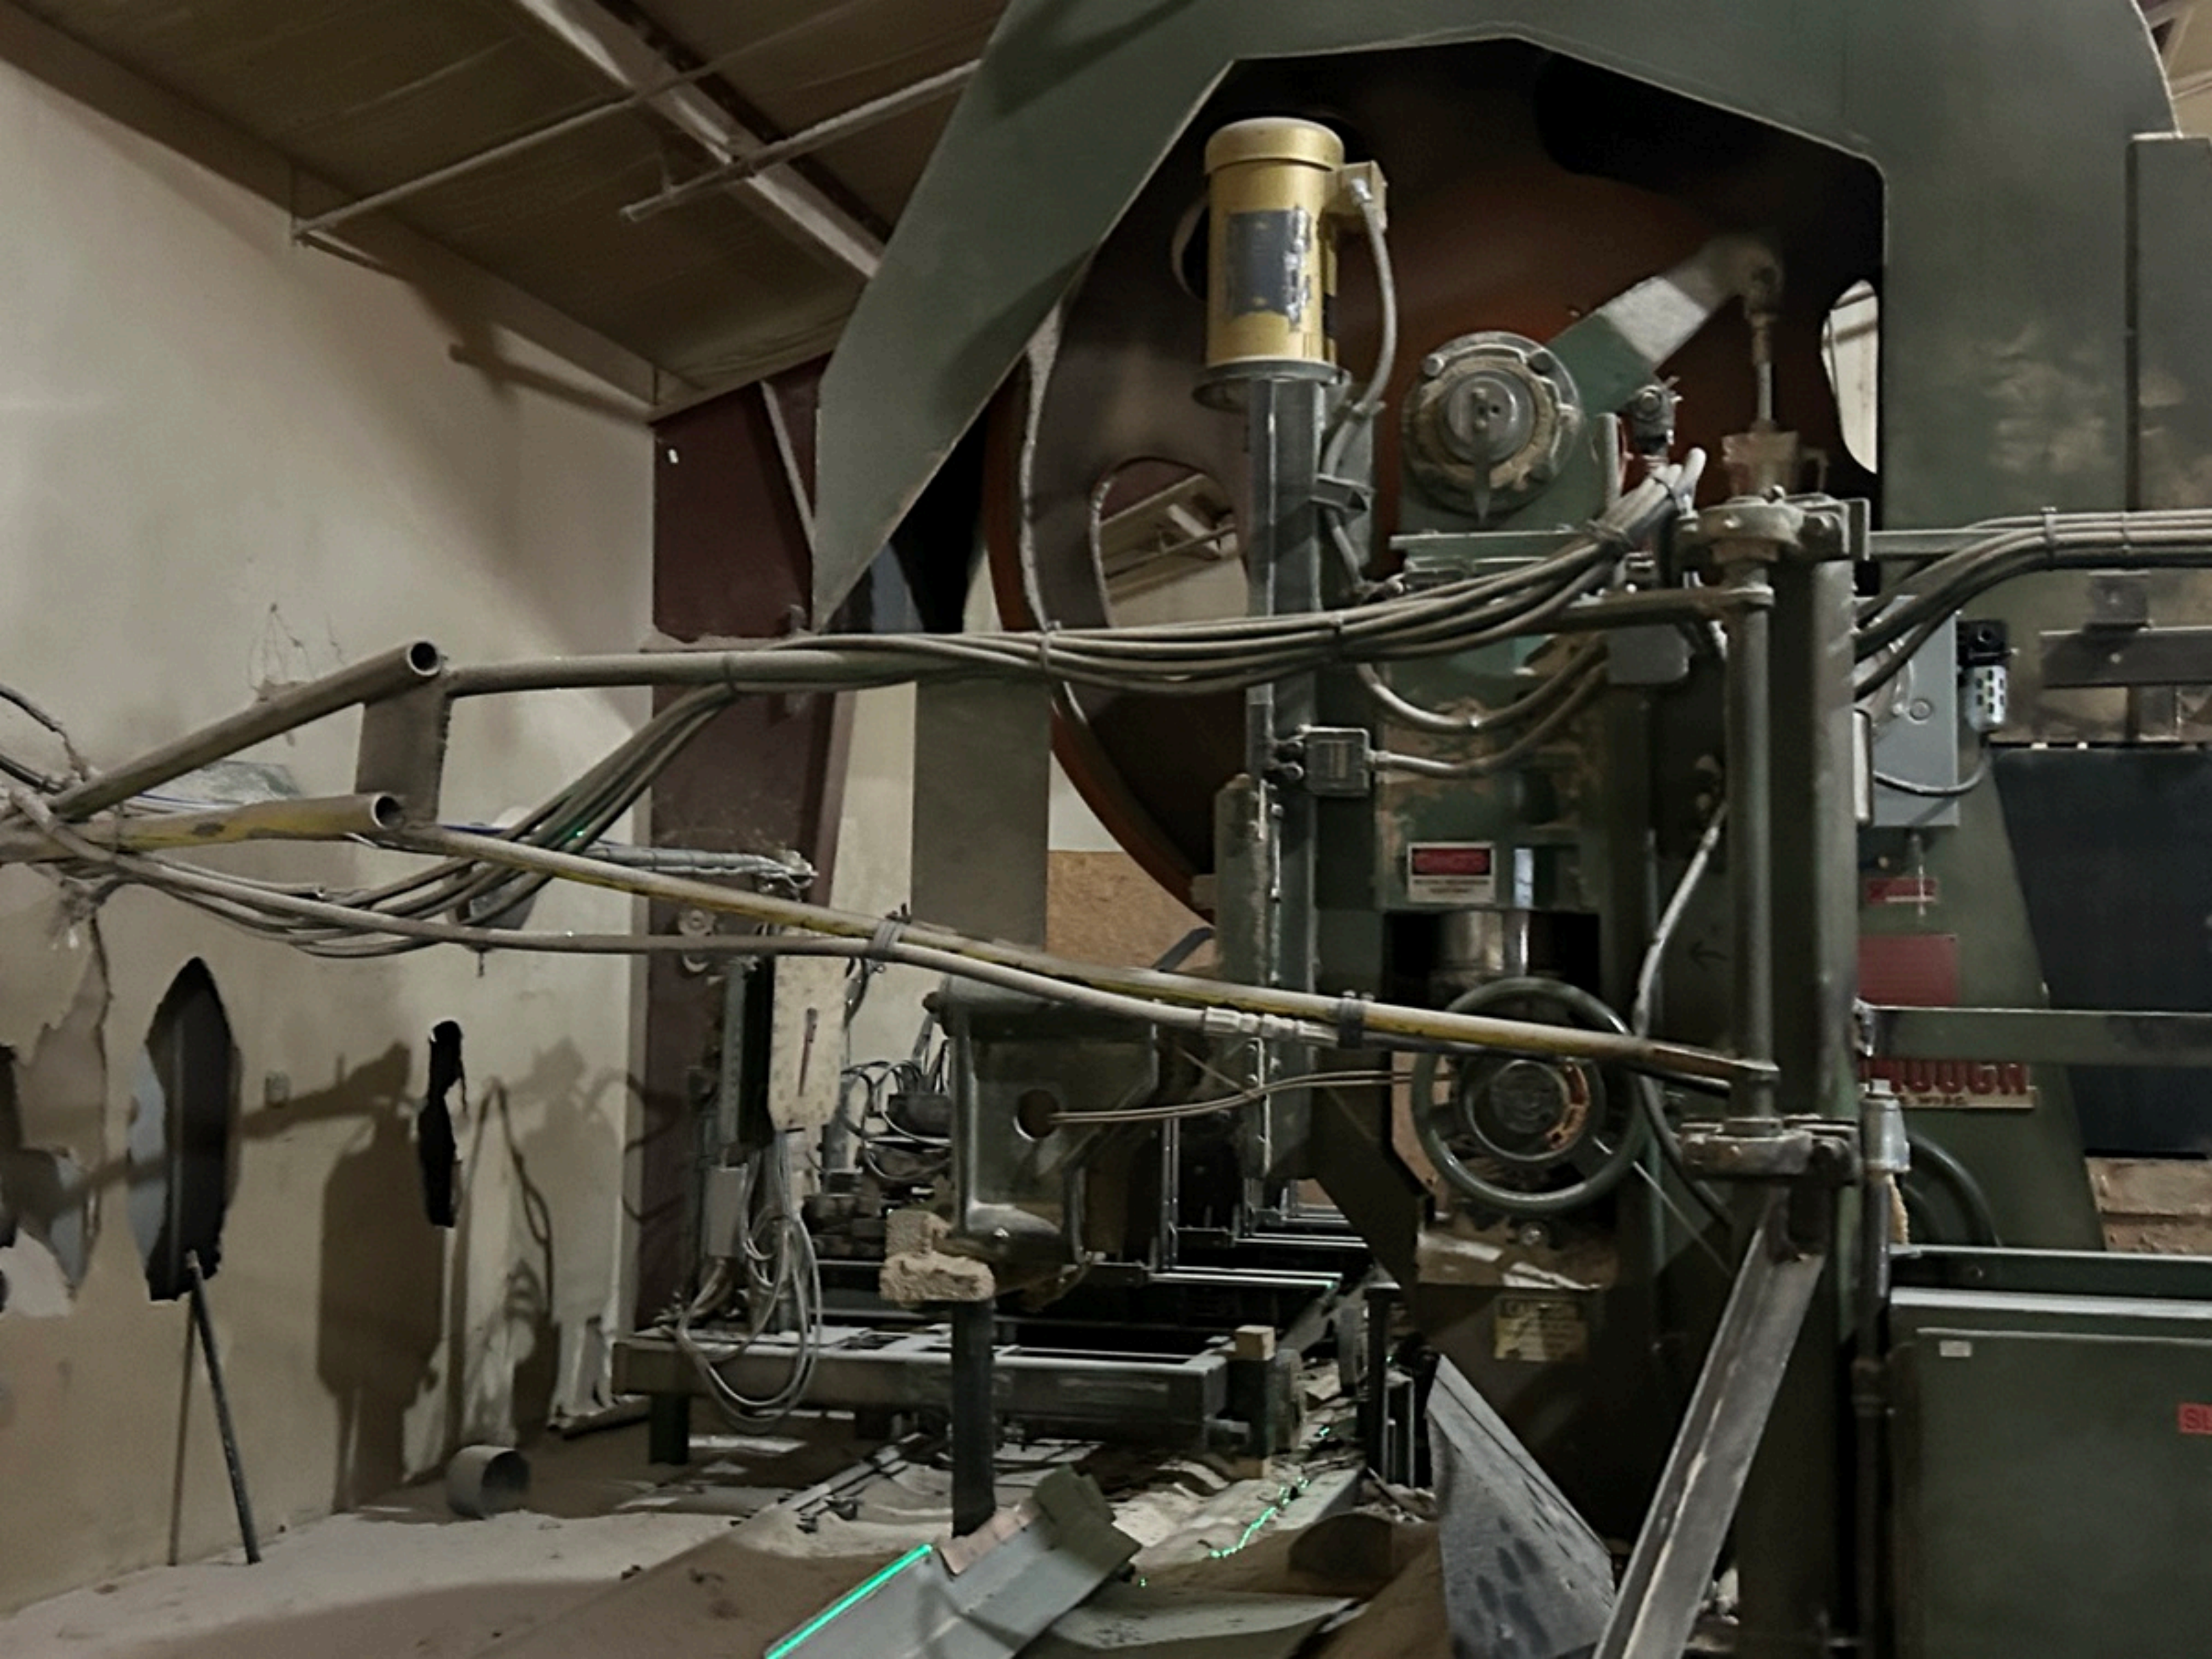



CAUTION

CAUTION

CAUTION

CAUTION

LH SAW

HMC Corporation  
ELECTRICAL EQUIPMENT  
SALES & SERVICE  
1000 W. 100th St.  
Tulsa, OK 74116

HIGH VOLTAGE



ON  
  
HEAVY DUTY  
Safety Switch  
OFF






DESTROY  
IN 2011  
Scuba








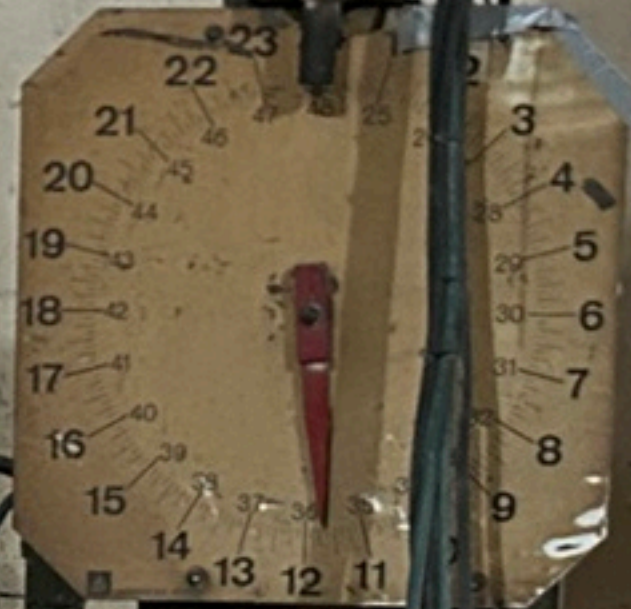

8  
D  
TW  
SCU



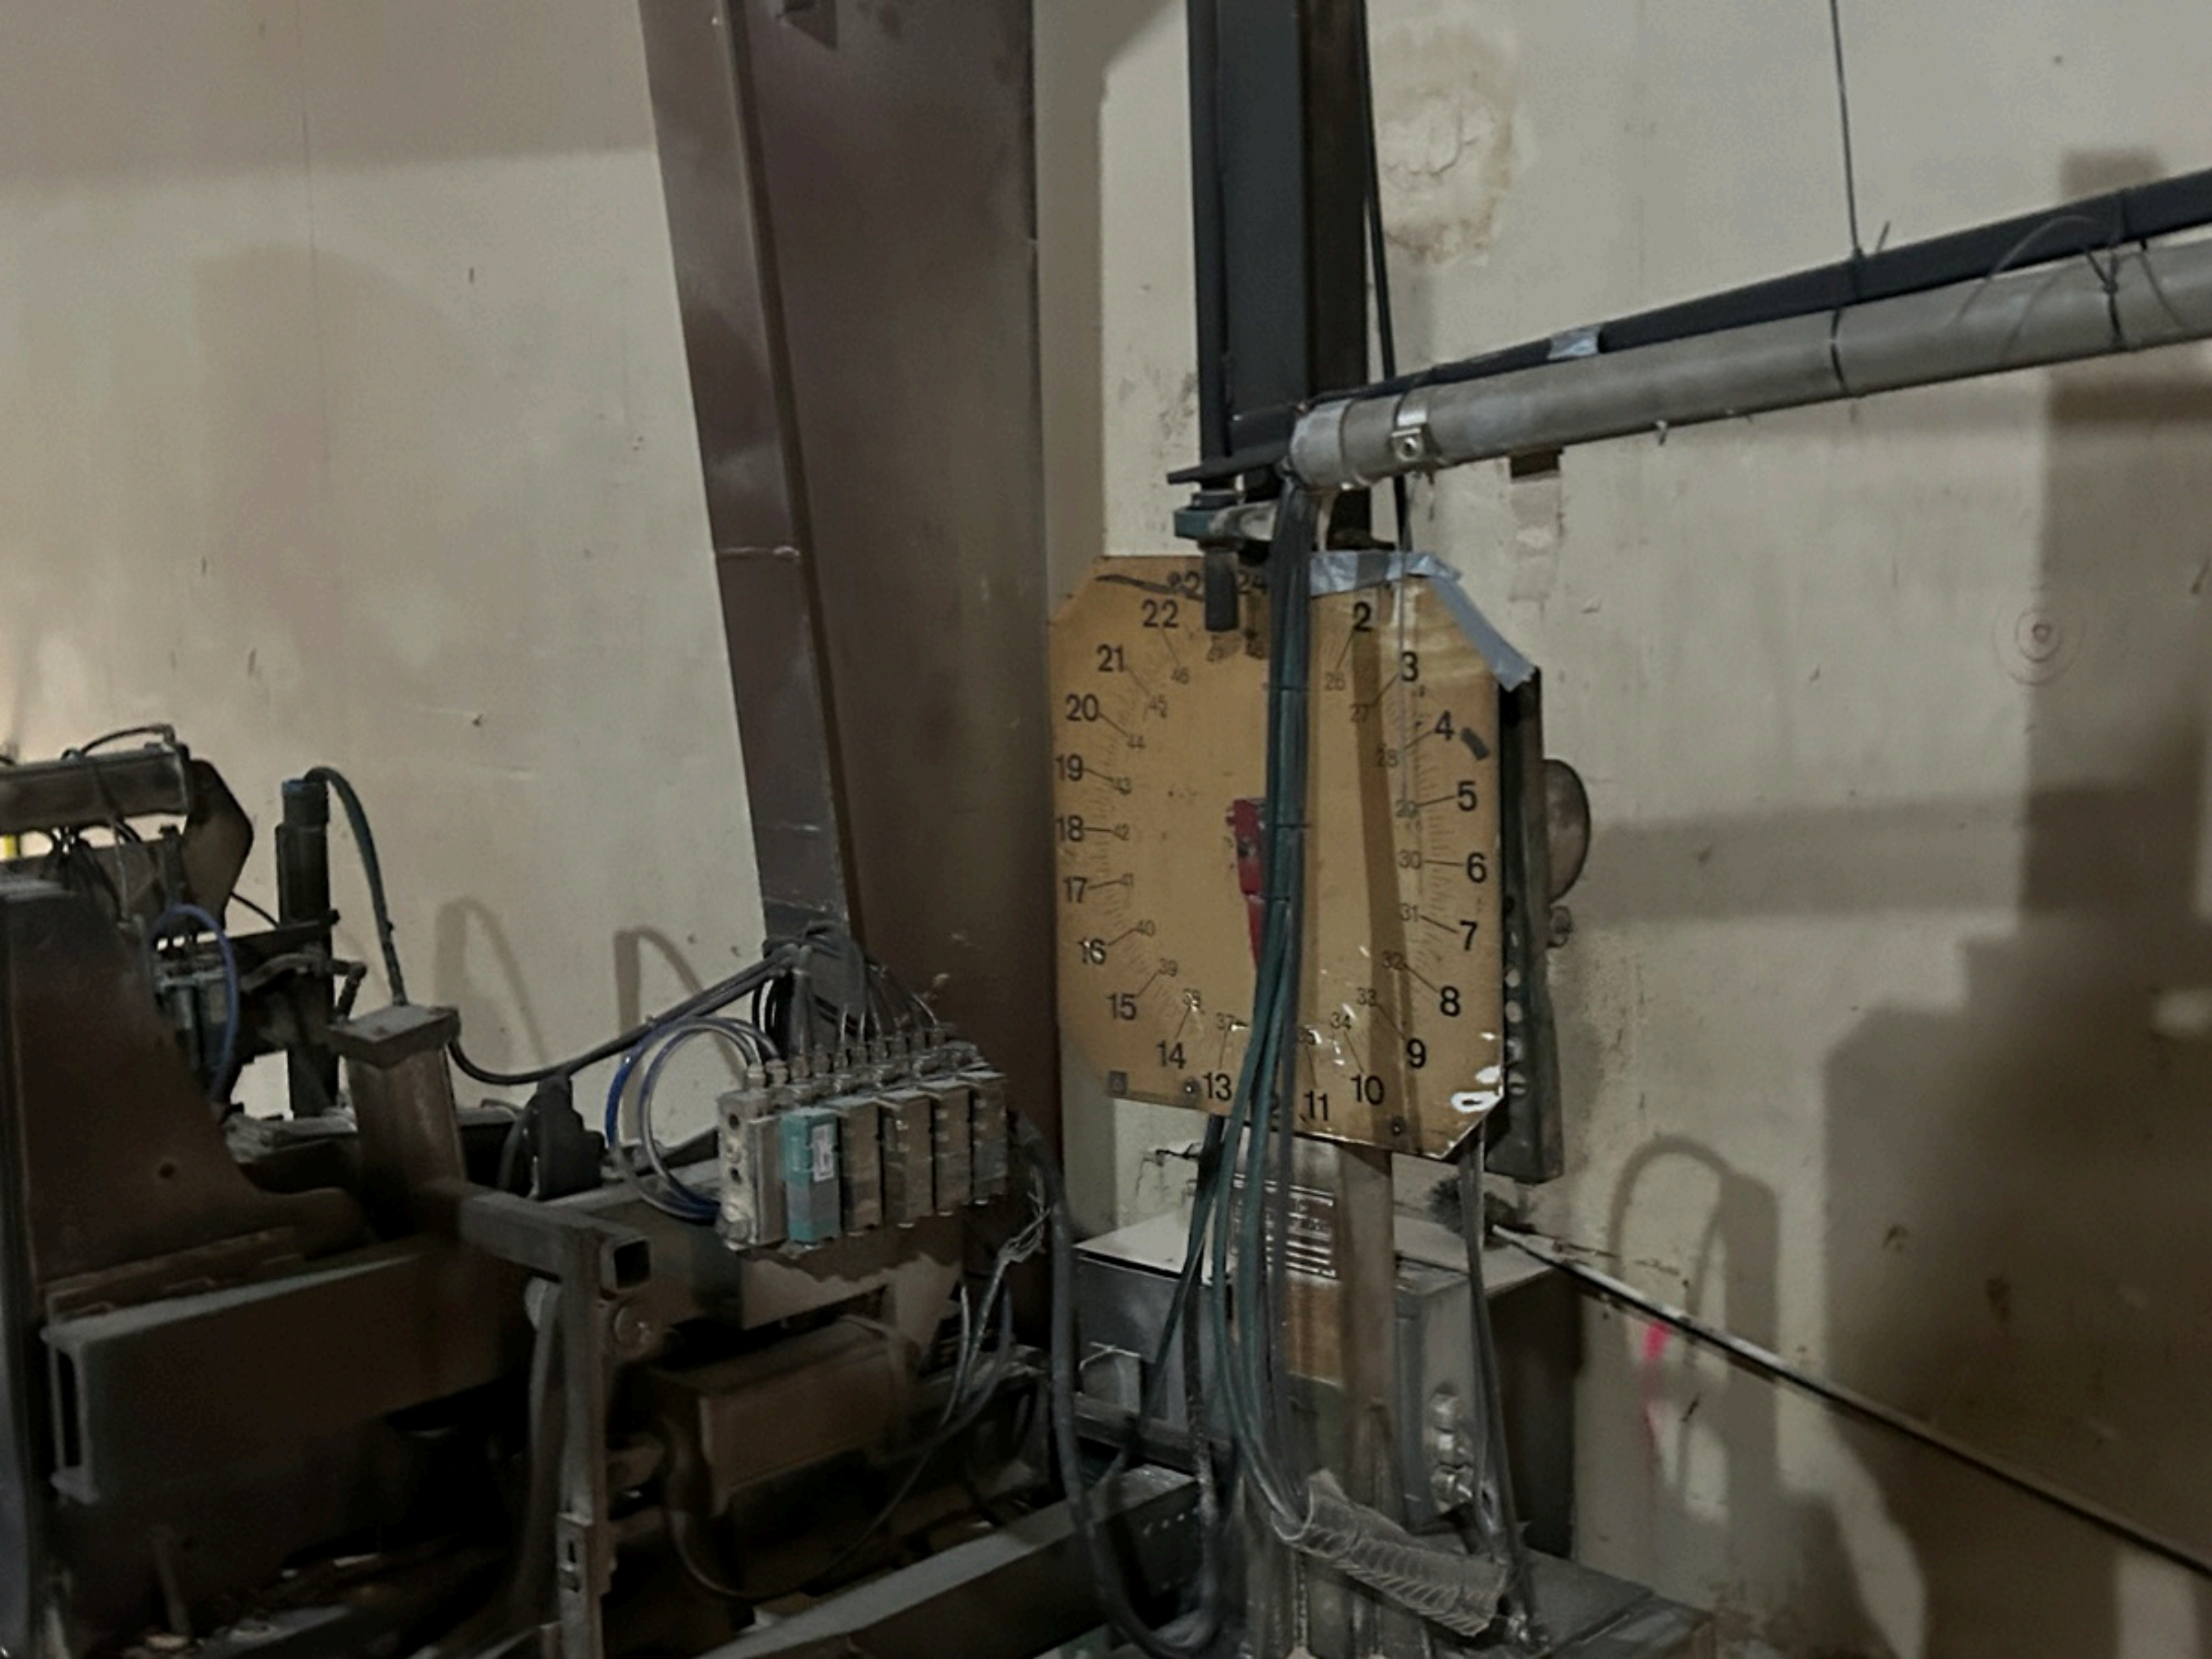



























Mc DONOUGH  
MFG. CO. - SAU CLARE, MI.


244-37









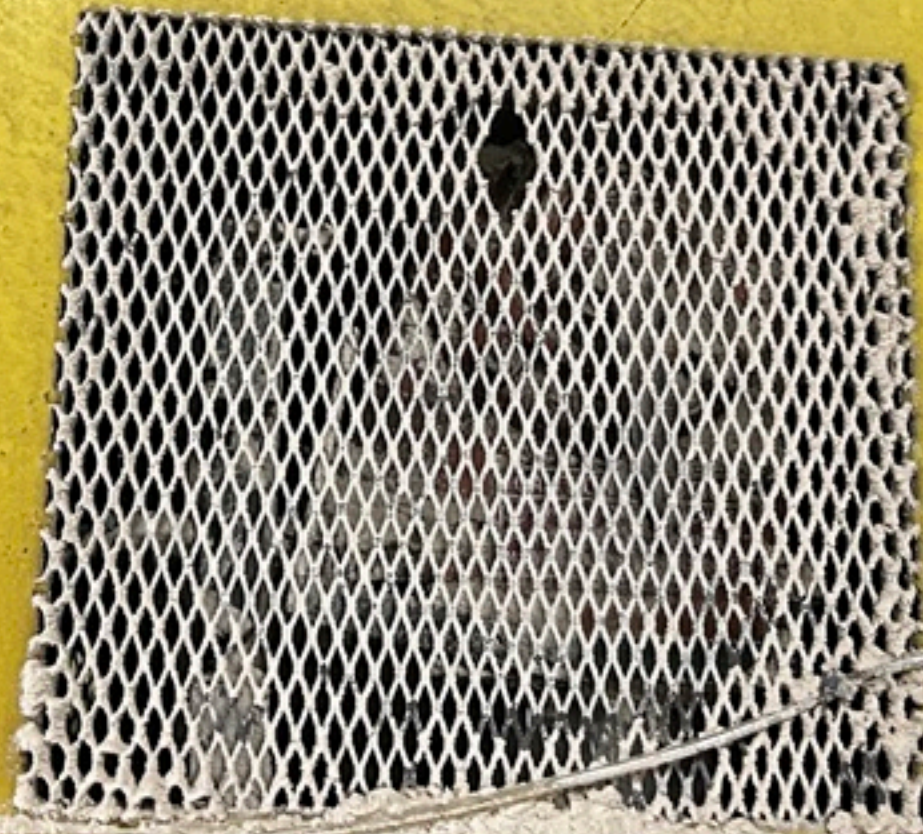




















McDONOUGH  
MFG. CO. INC.

AMS U



IN FRONT OF EDGER

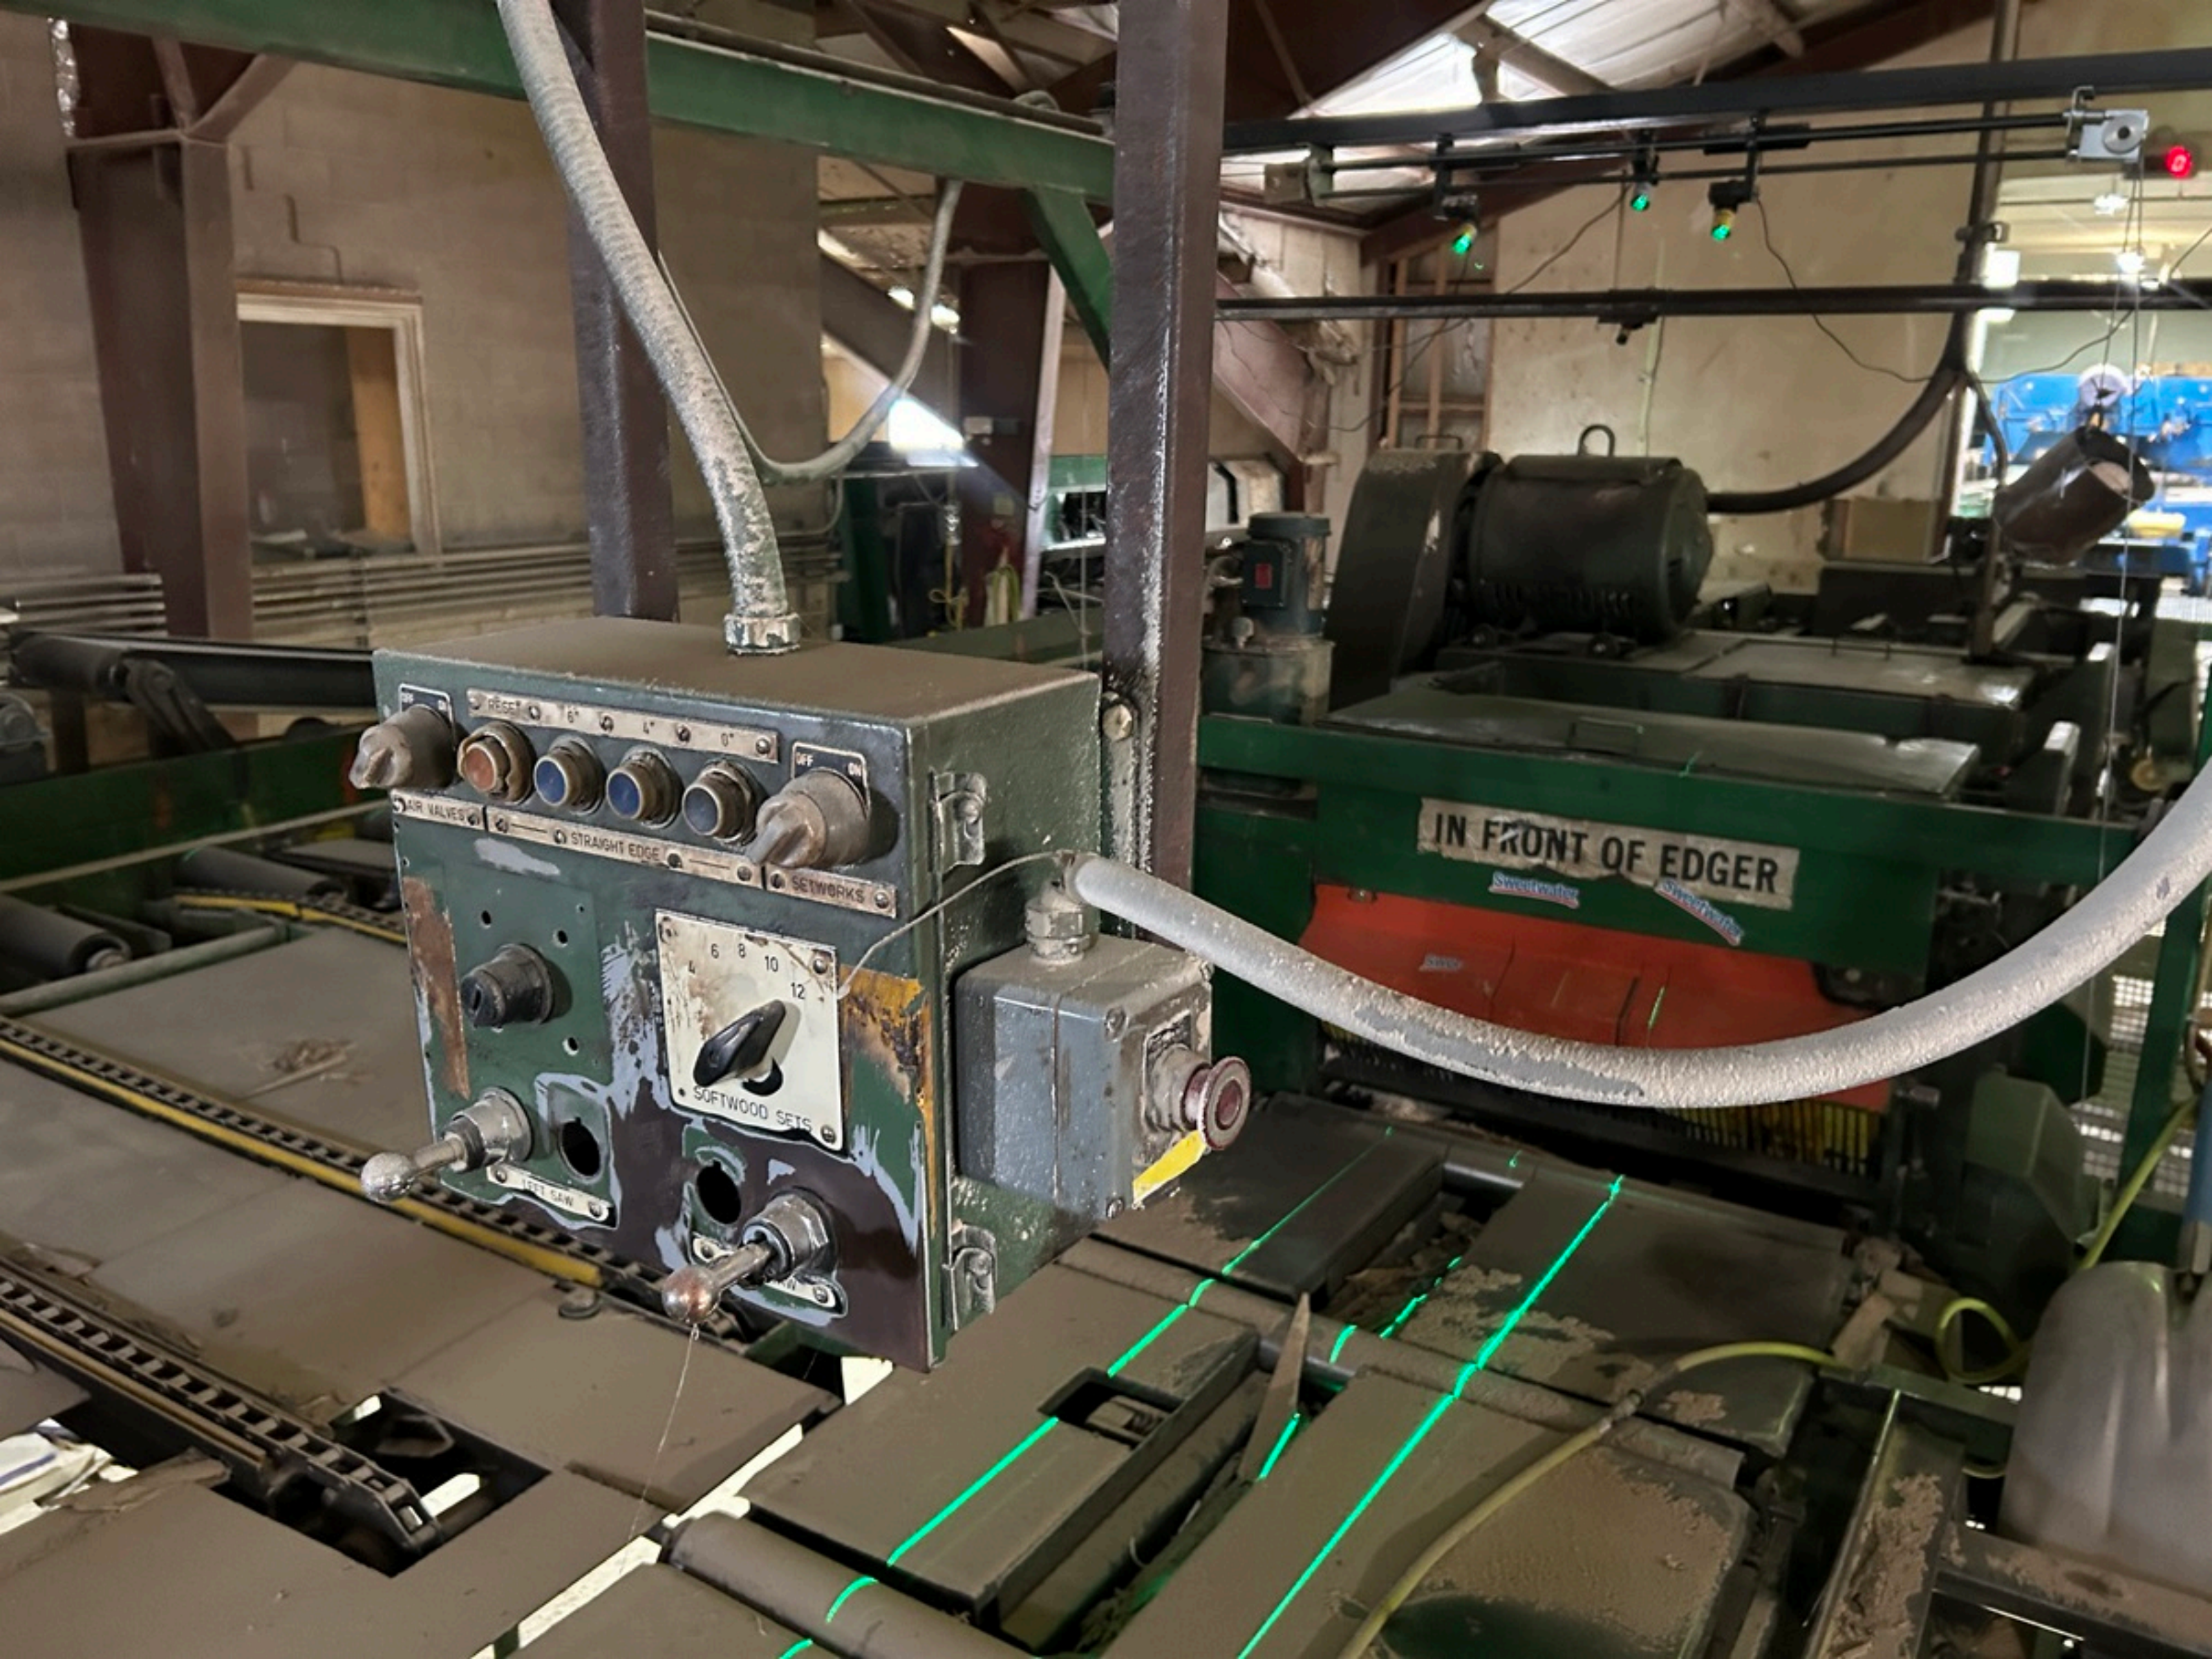

RESET 6" 4" 0" OFF ON

AIR VALVES STRAIGHT EDGE SETWORKS

6 8 10 12

SOFTWOOD SETS

LEFT SAW

IN FRONT OF EDGER

IN FRONT OF EDGER

Sweetwater

Sweetwater



























NEW  
2nd Bands

3rd  
DULL




Custom Built For

*Custom Quilt Jan*

**BRUCE  
LUMBER**  **INC**



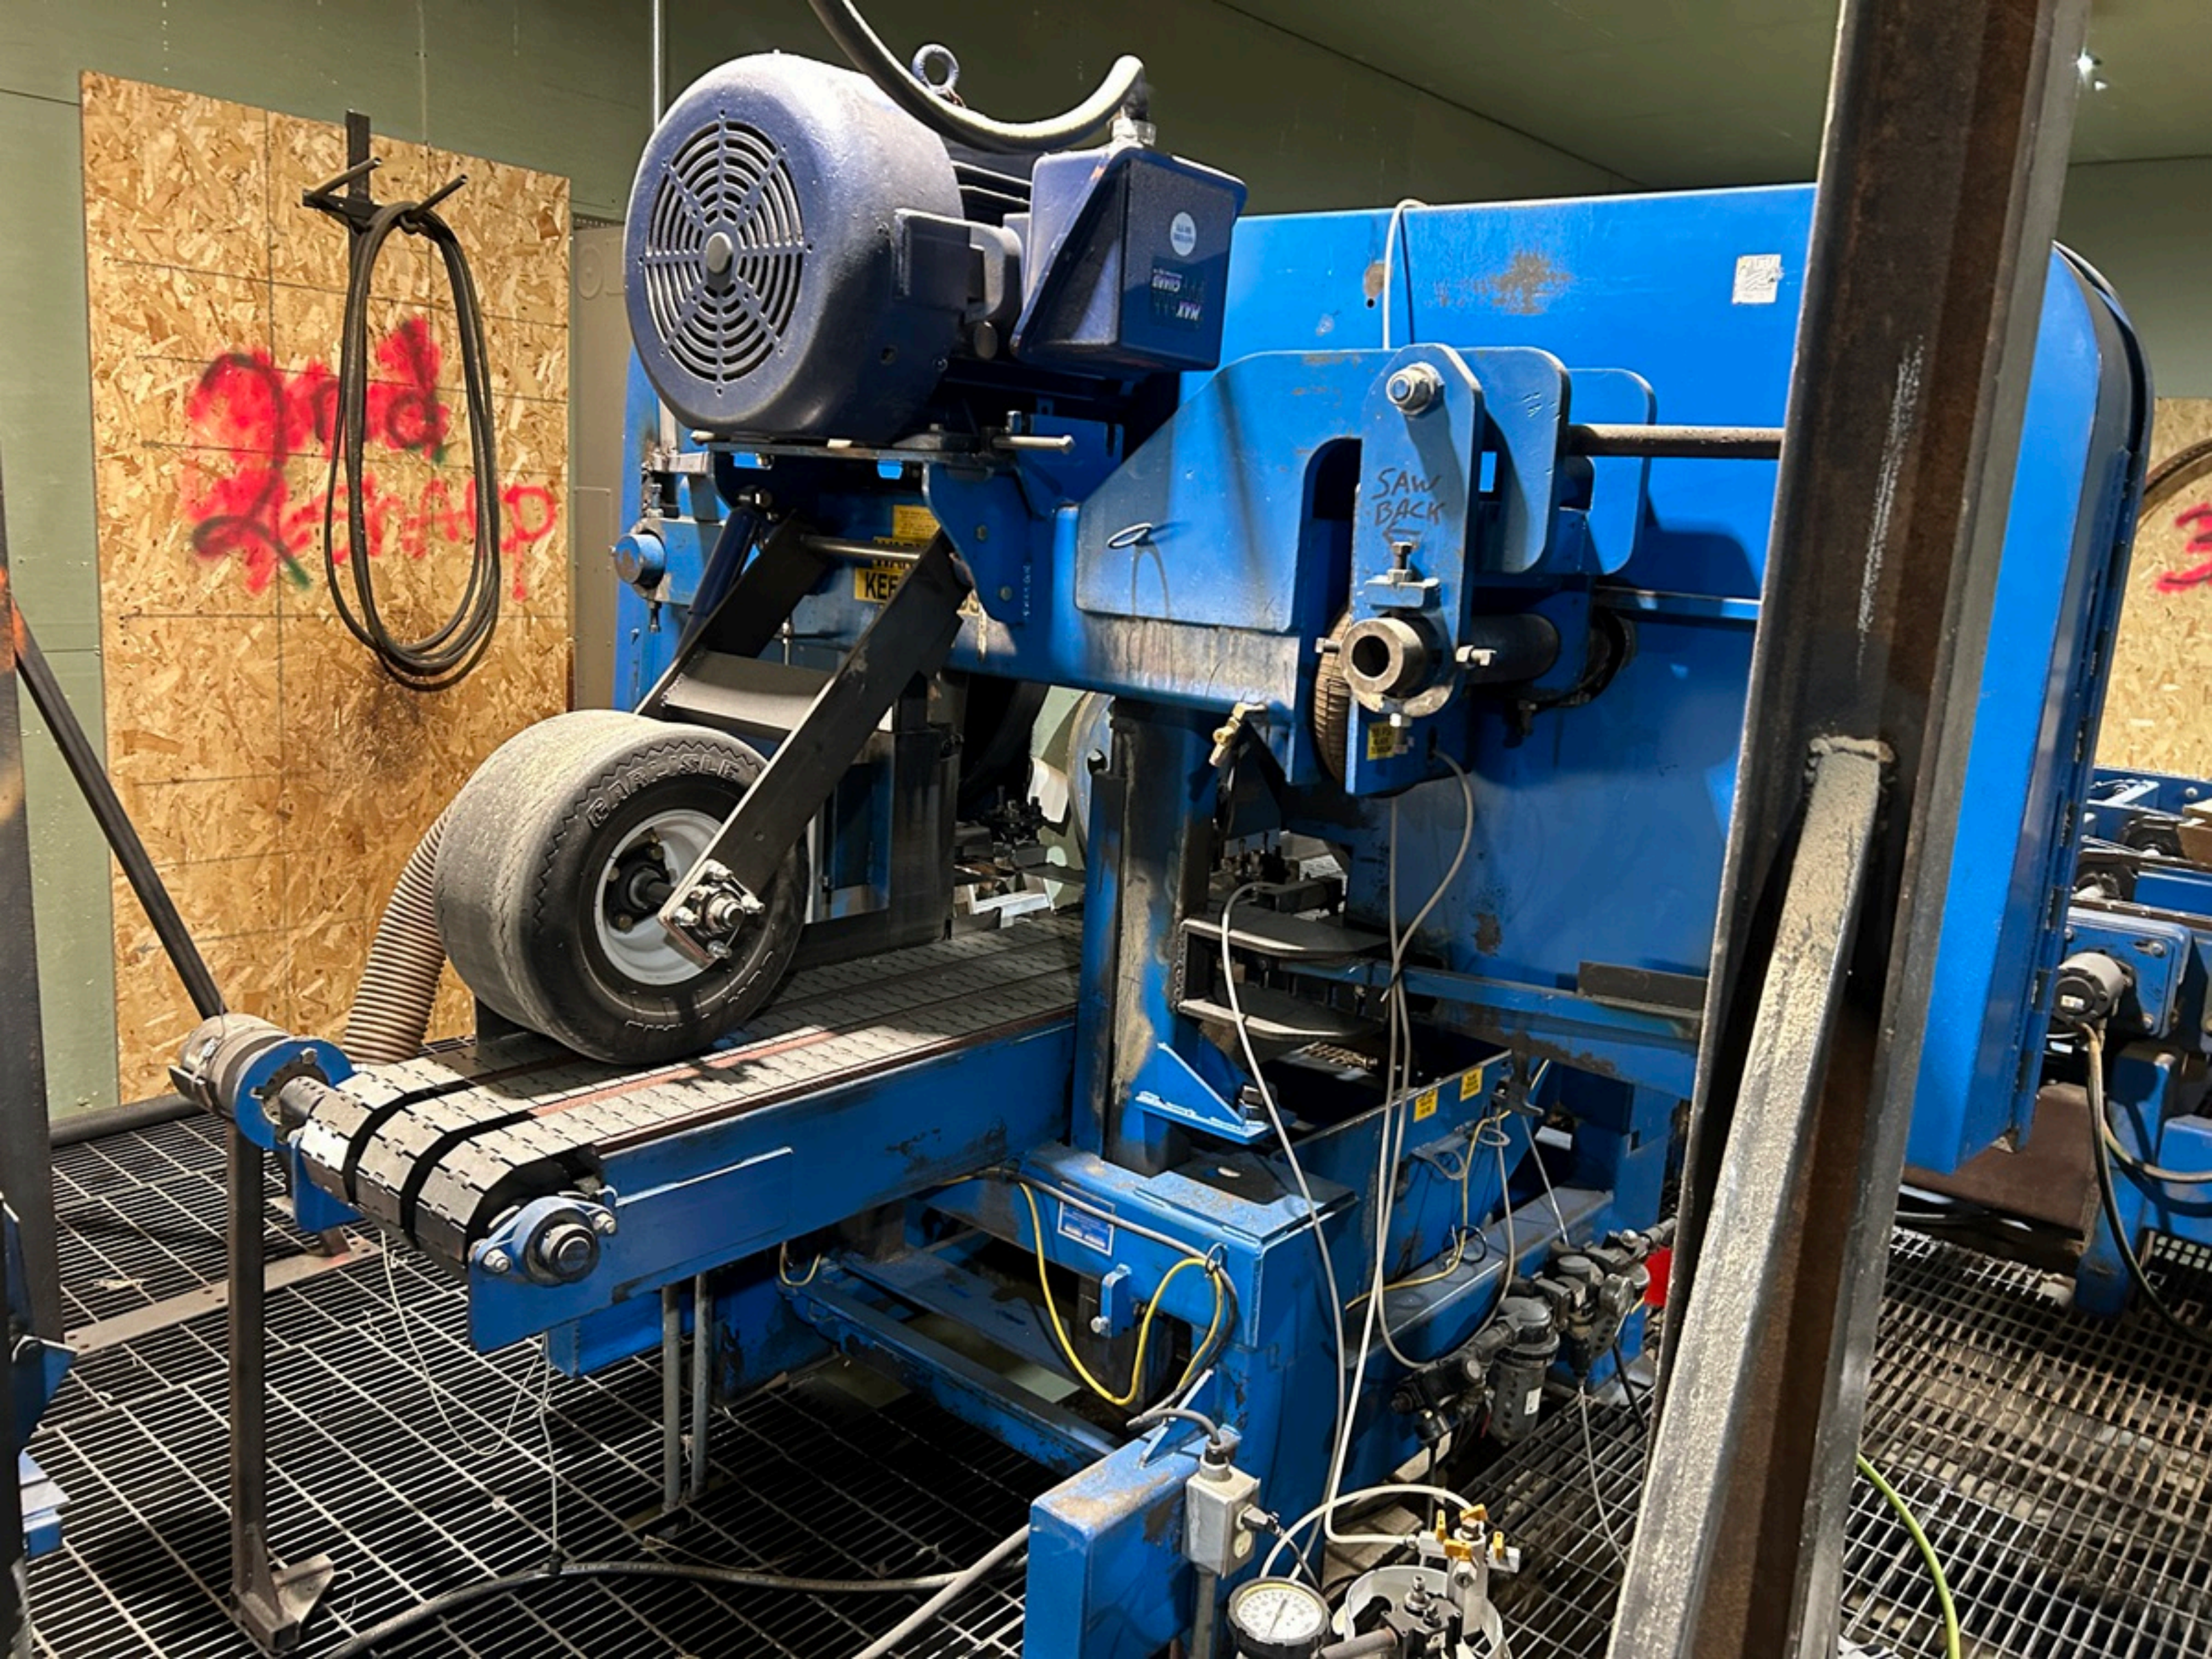

**ORW**

INCORPORATED  
CENTRAL CITY, KENTUCKY.  
42330

SERIAL NUMBER

BBJ0351

MODEL NUMBER

B1600

300V FT1

P-7K-SC-261061-1-MSHR

10120526



**5-WAY BOARD SEPARATOR**  
1. DUMP CANT BOARD EXIT  
2. DUMP CANT BOARD TO EDGER  
3. EVERYTHING RETURN  
4. EVERYTHING TO EDGER  
5. ALL EXIT

←  
F  
R


DECK FORWARD  
INFEED POPUPS  
3-WAY CHAINS REVERSE

FEED WOOD  
CHAINS REVERSE  
INFEED POPUPS

**Brewco Inc.**

Saw Hdy

JB1

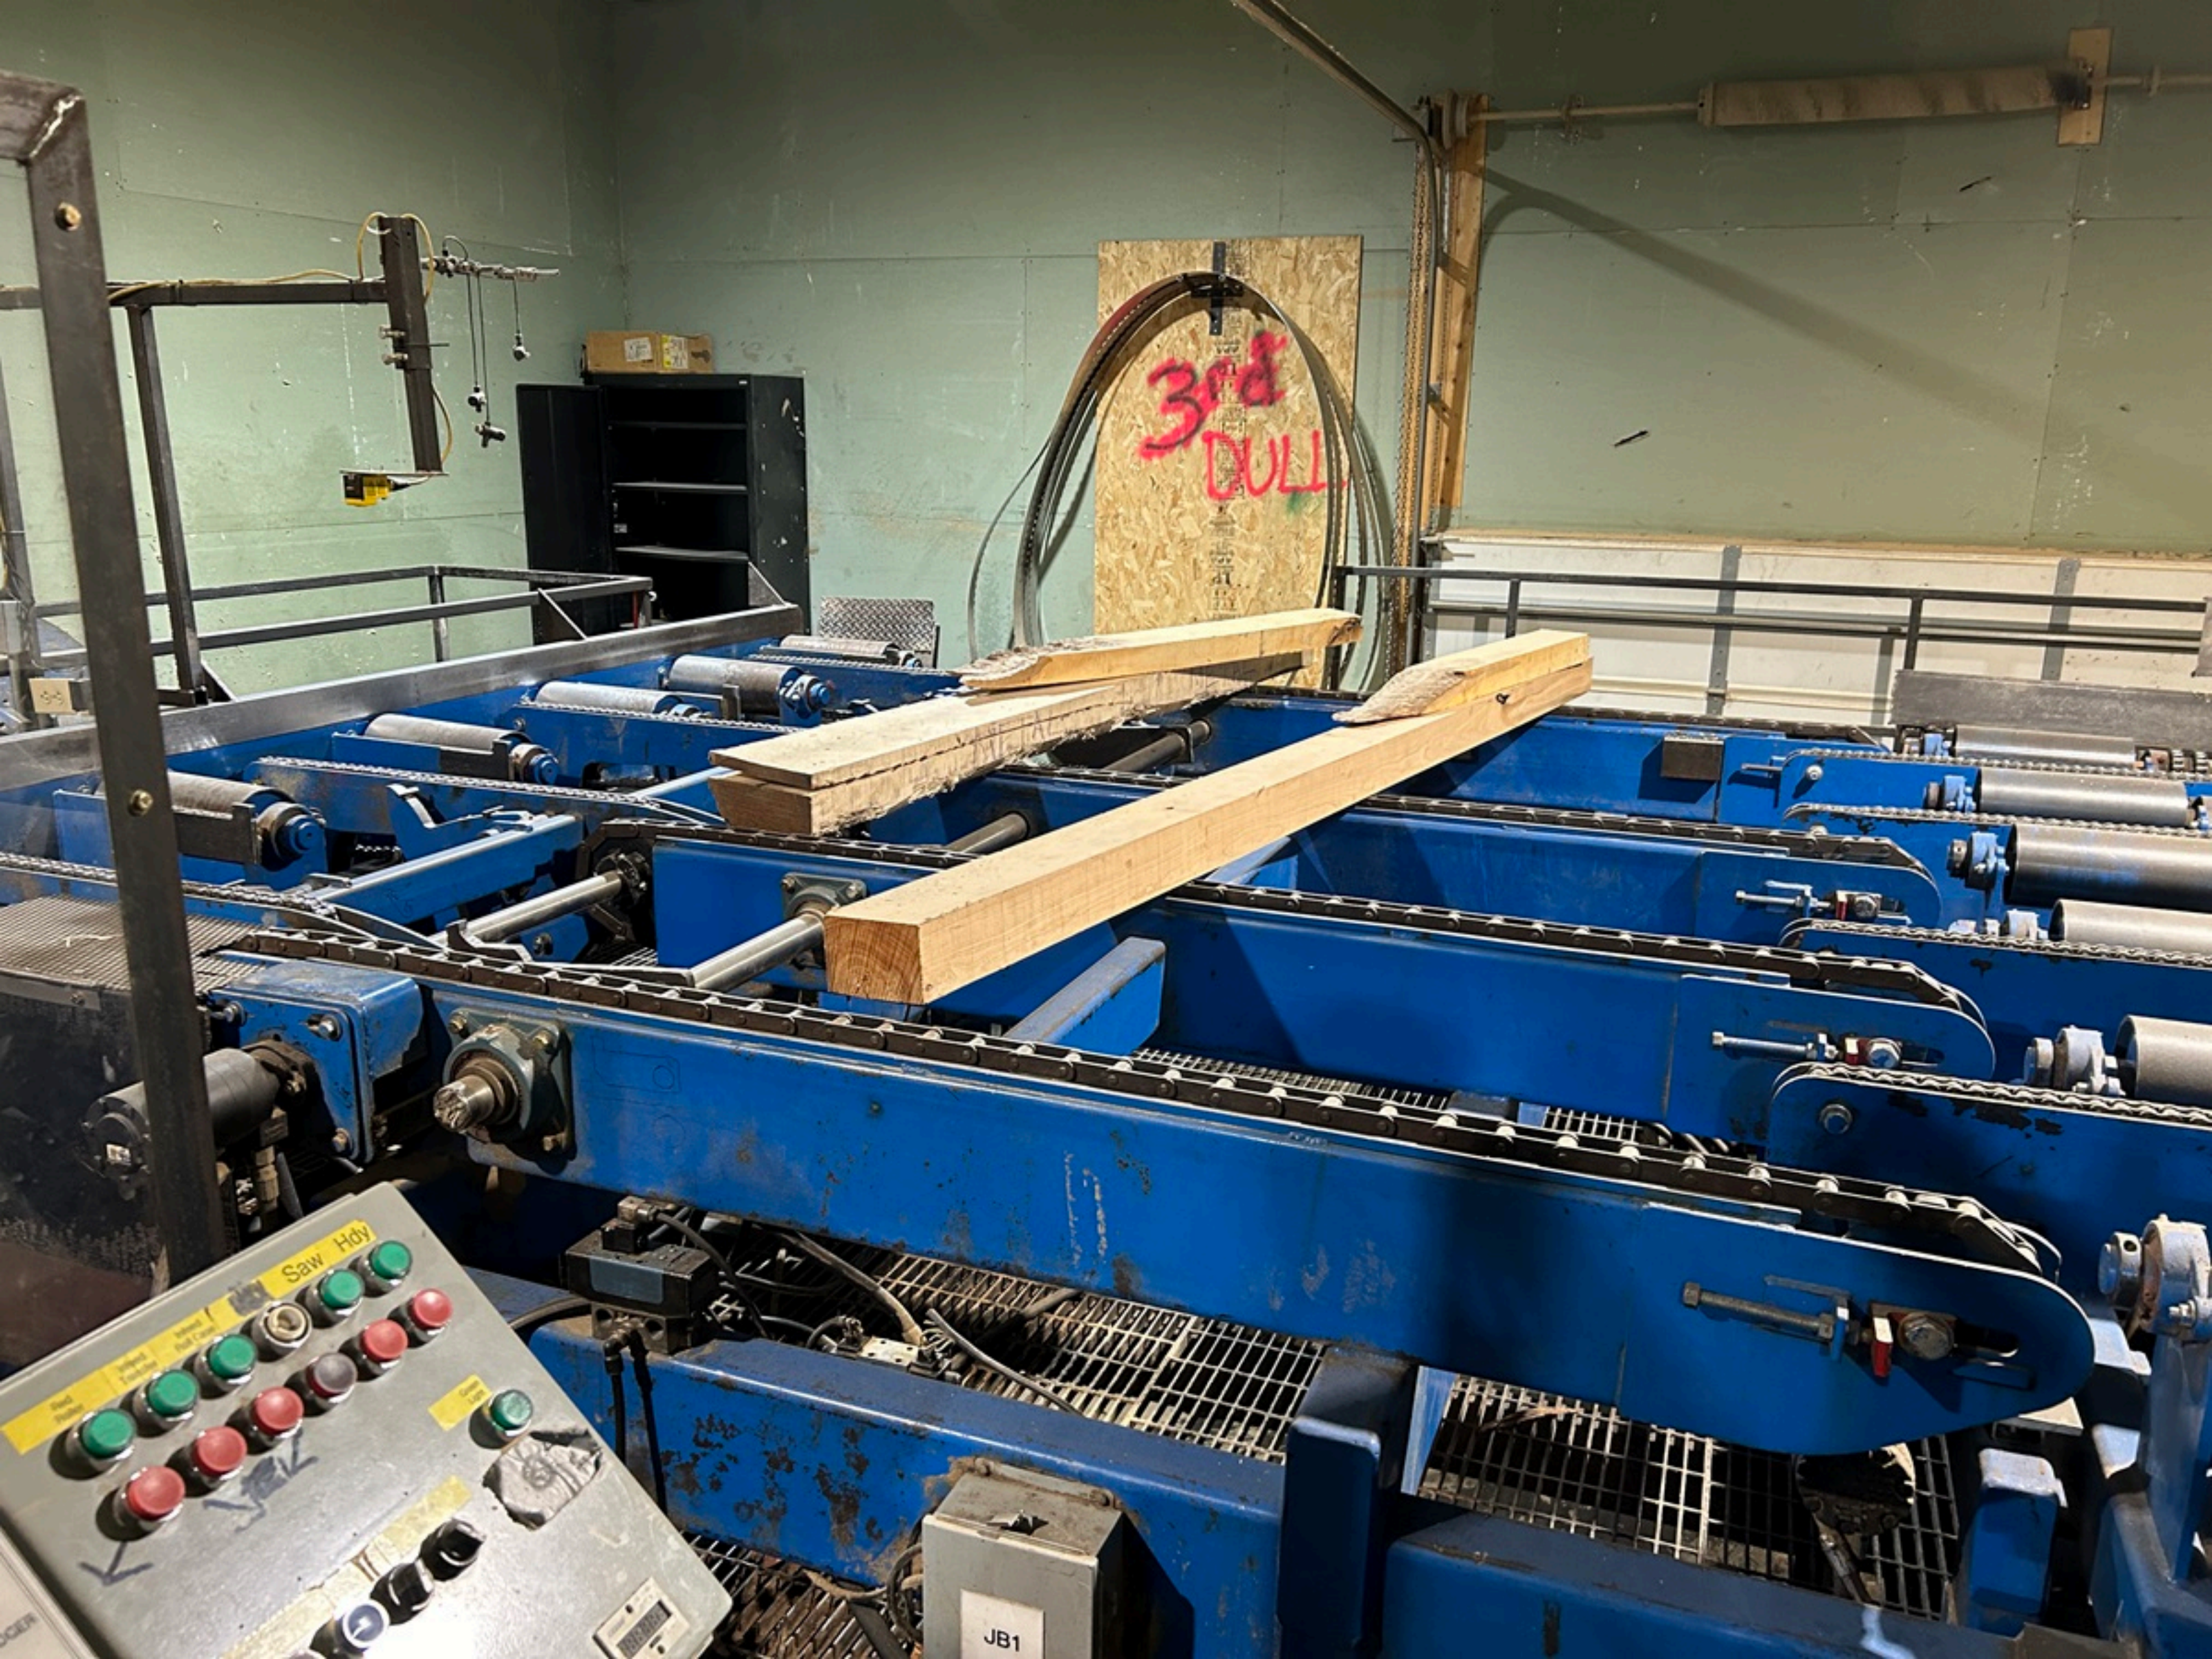

3rd  
DULL

Saw Hdy

JB1



Custom Built For  
**BROOKSIDE**  
**LUMBER**

**BREWCO**

THE  
**WOLF**

**WARNING! KEEP HANDS CLEAR**

Allen Bradley  
Centrifugal Motor Control Center





**WARNING! KEEP HANDS CLEAR**







THE  
WOLF

B-1600













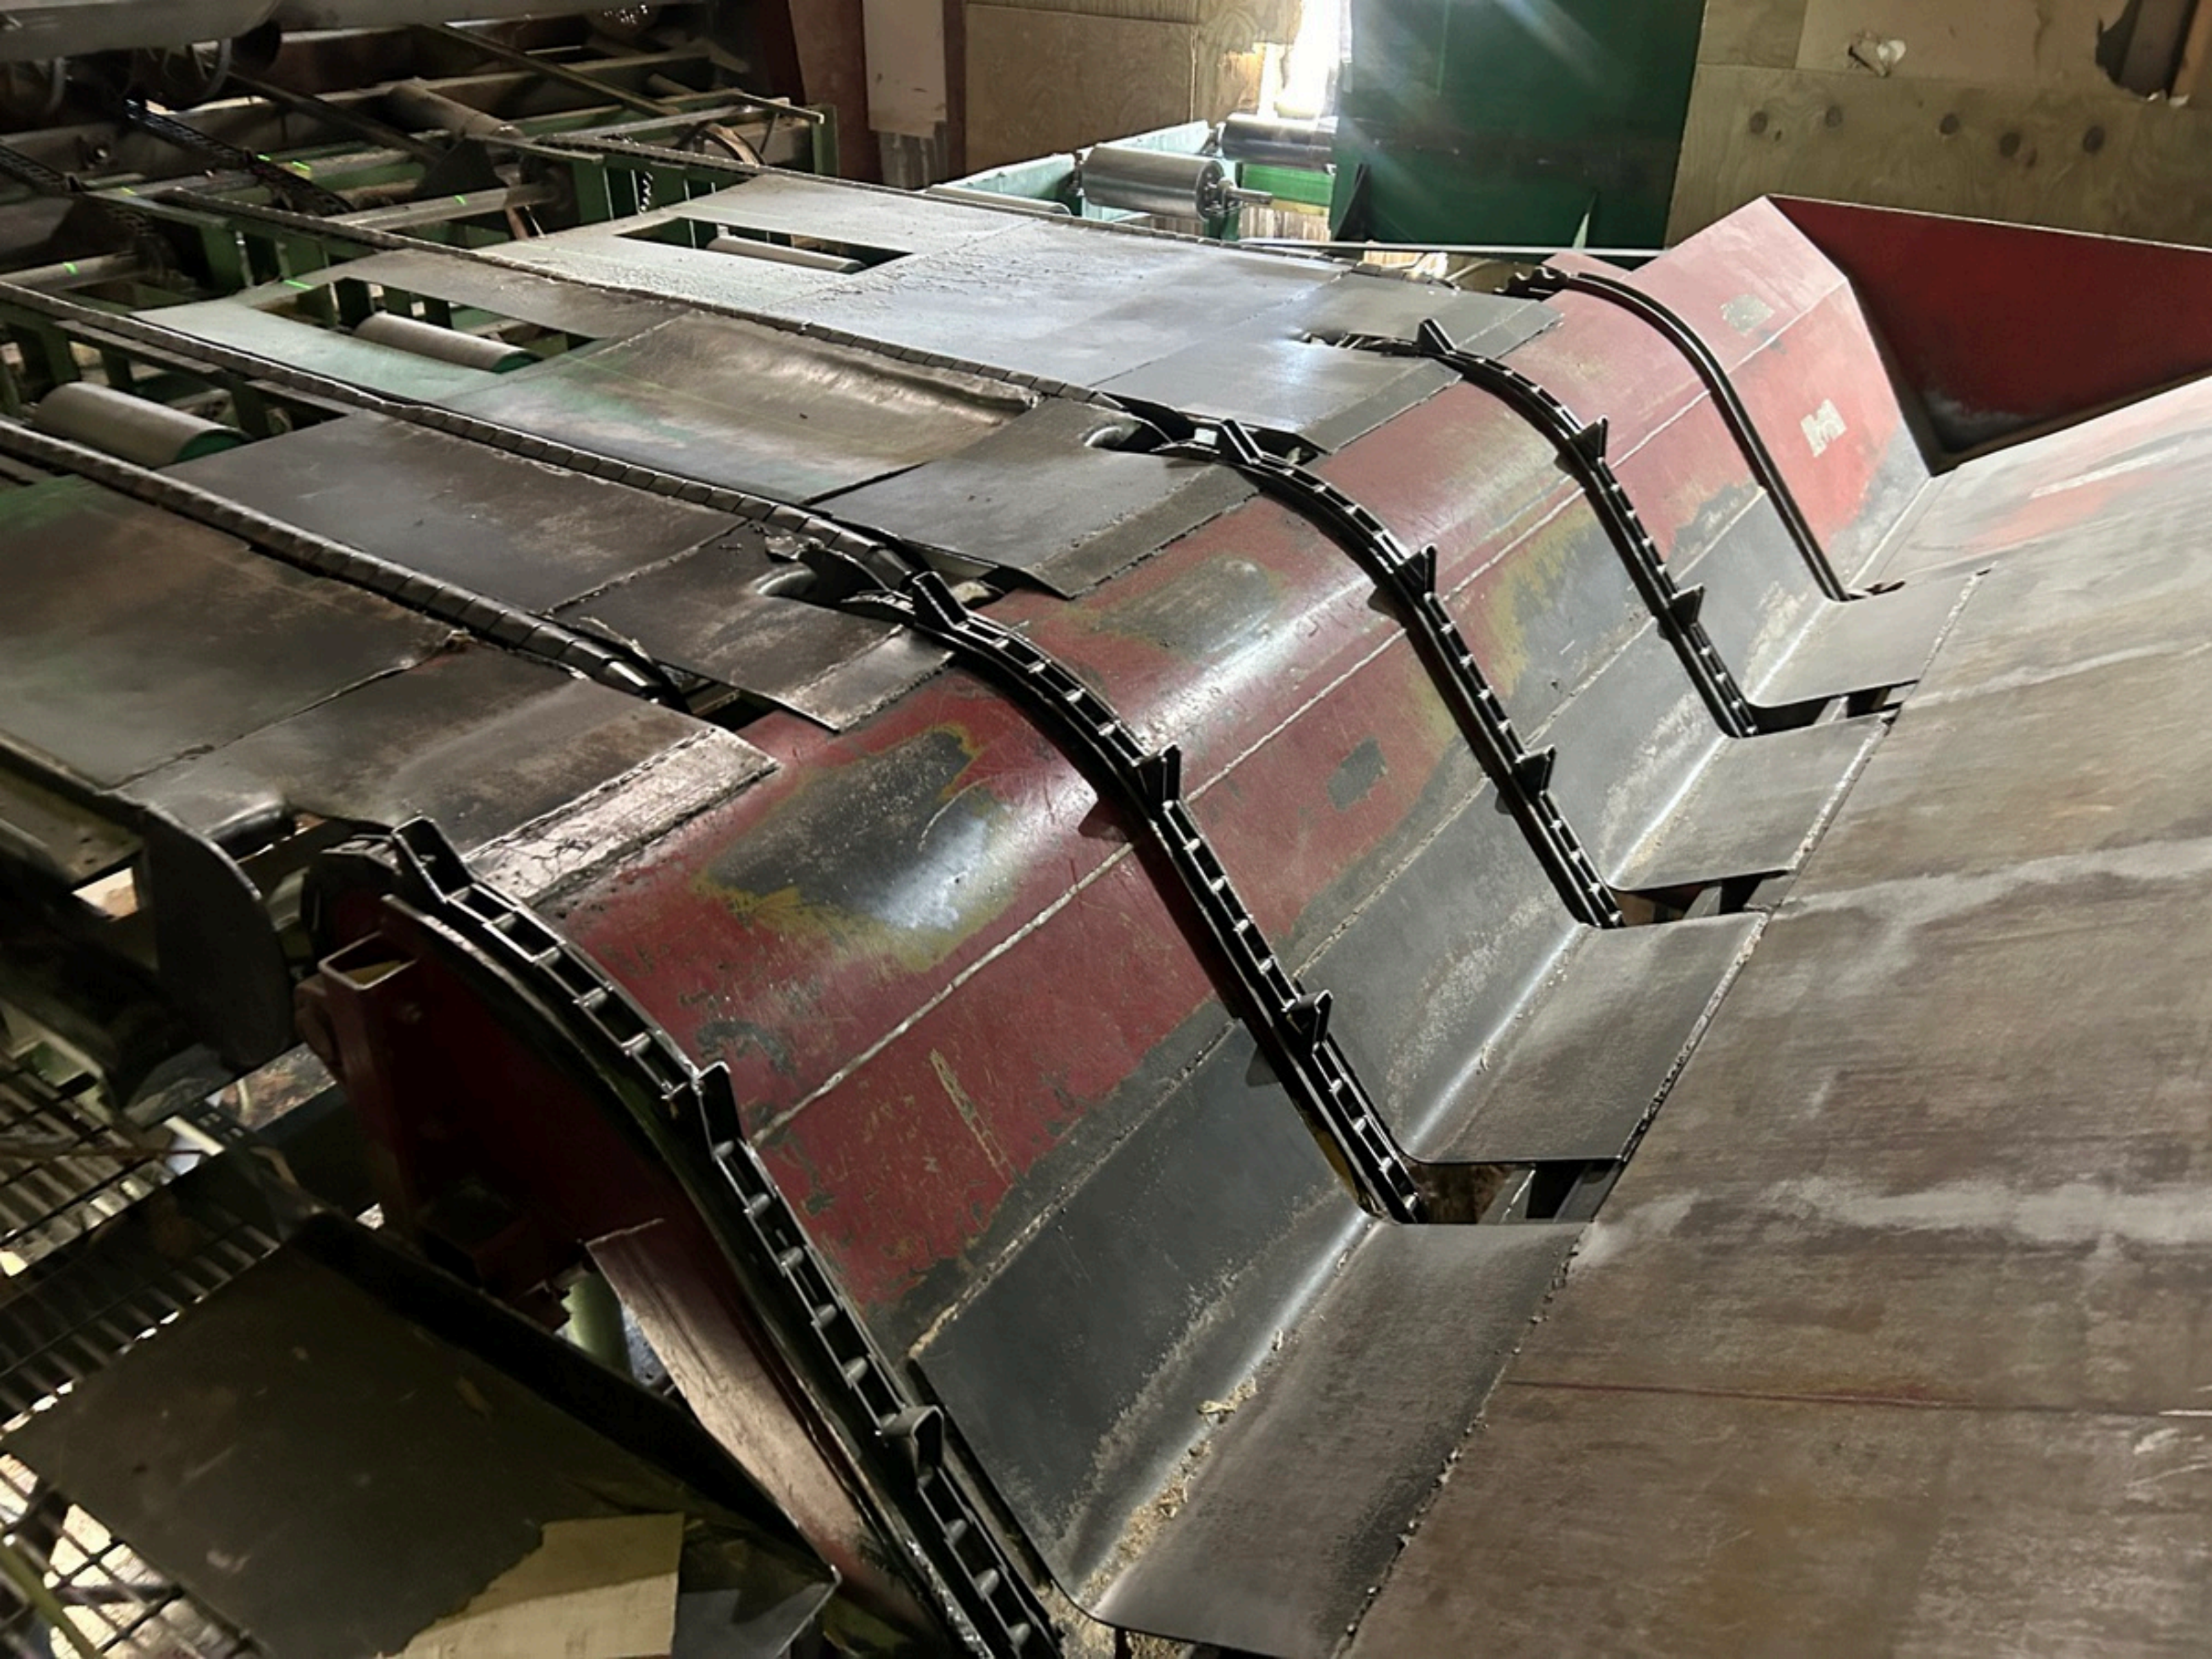





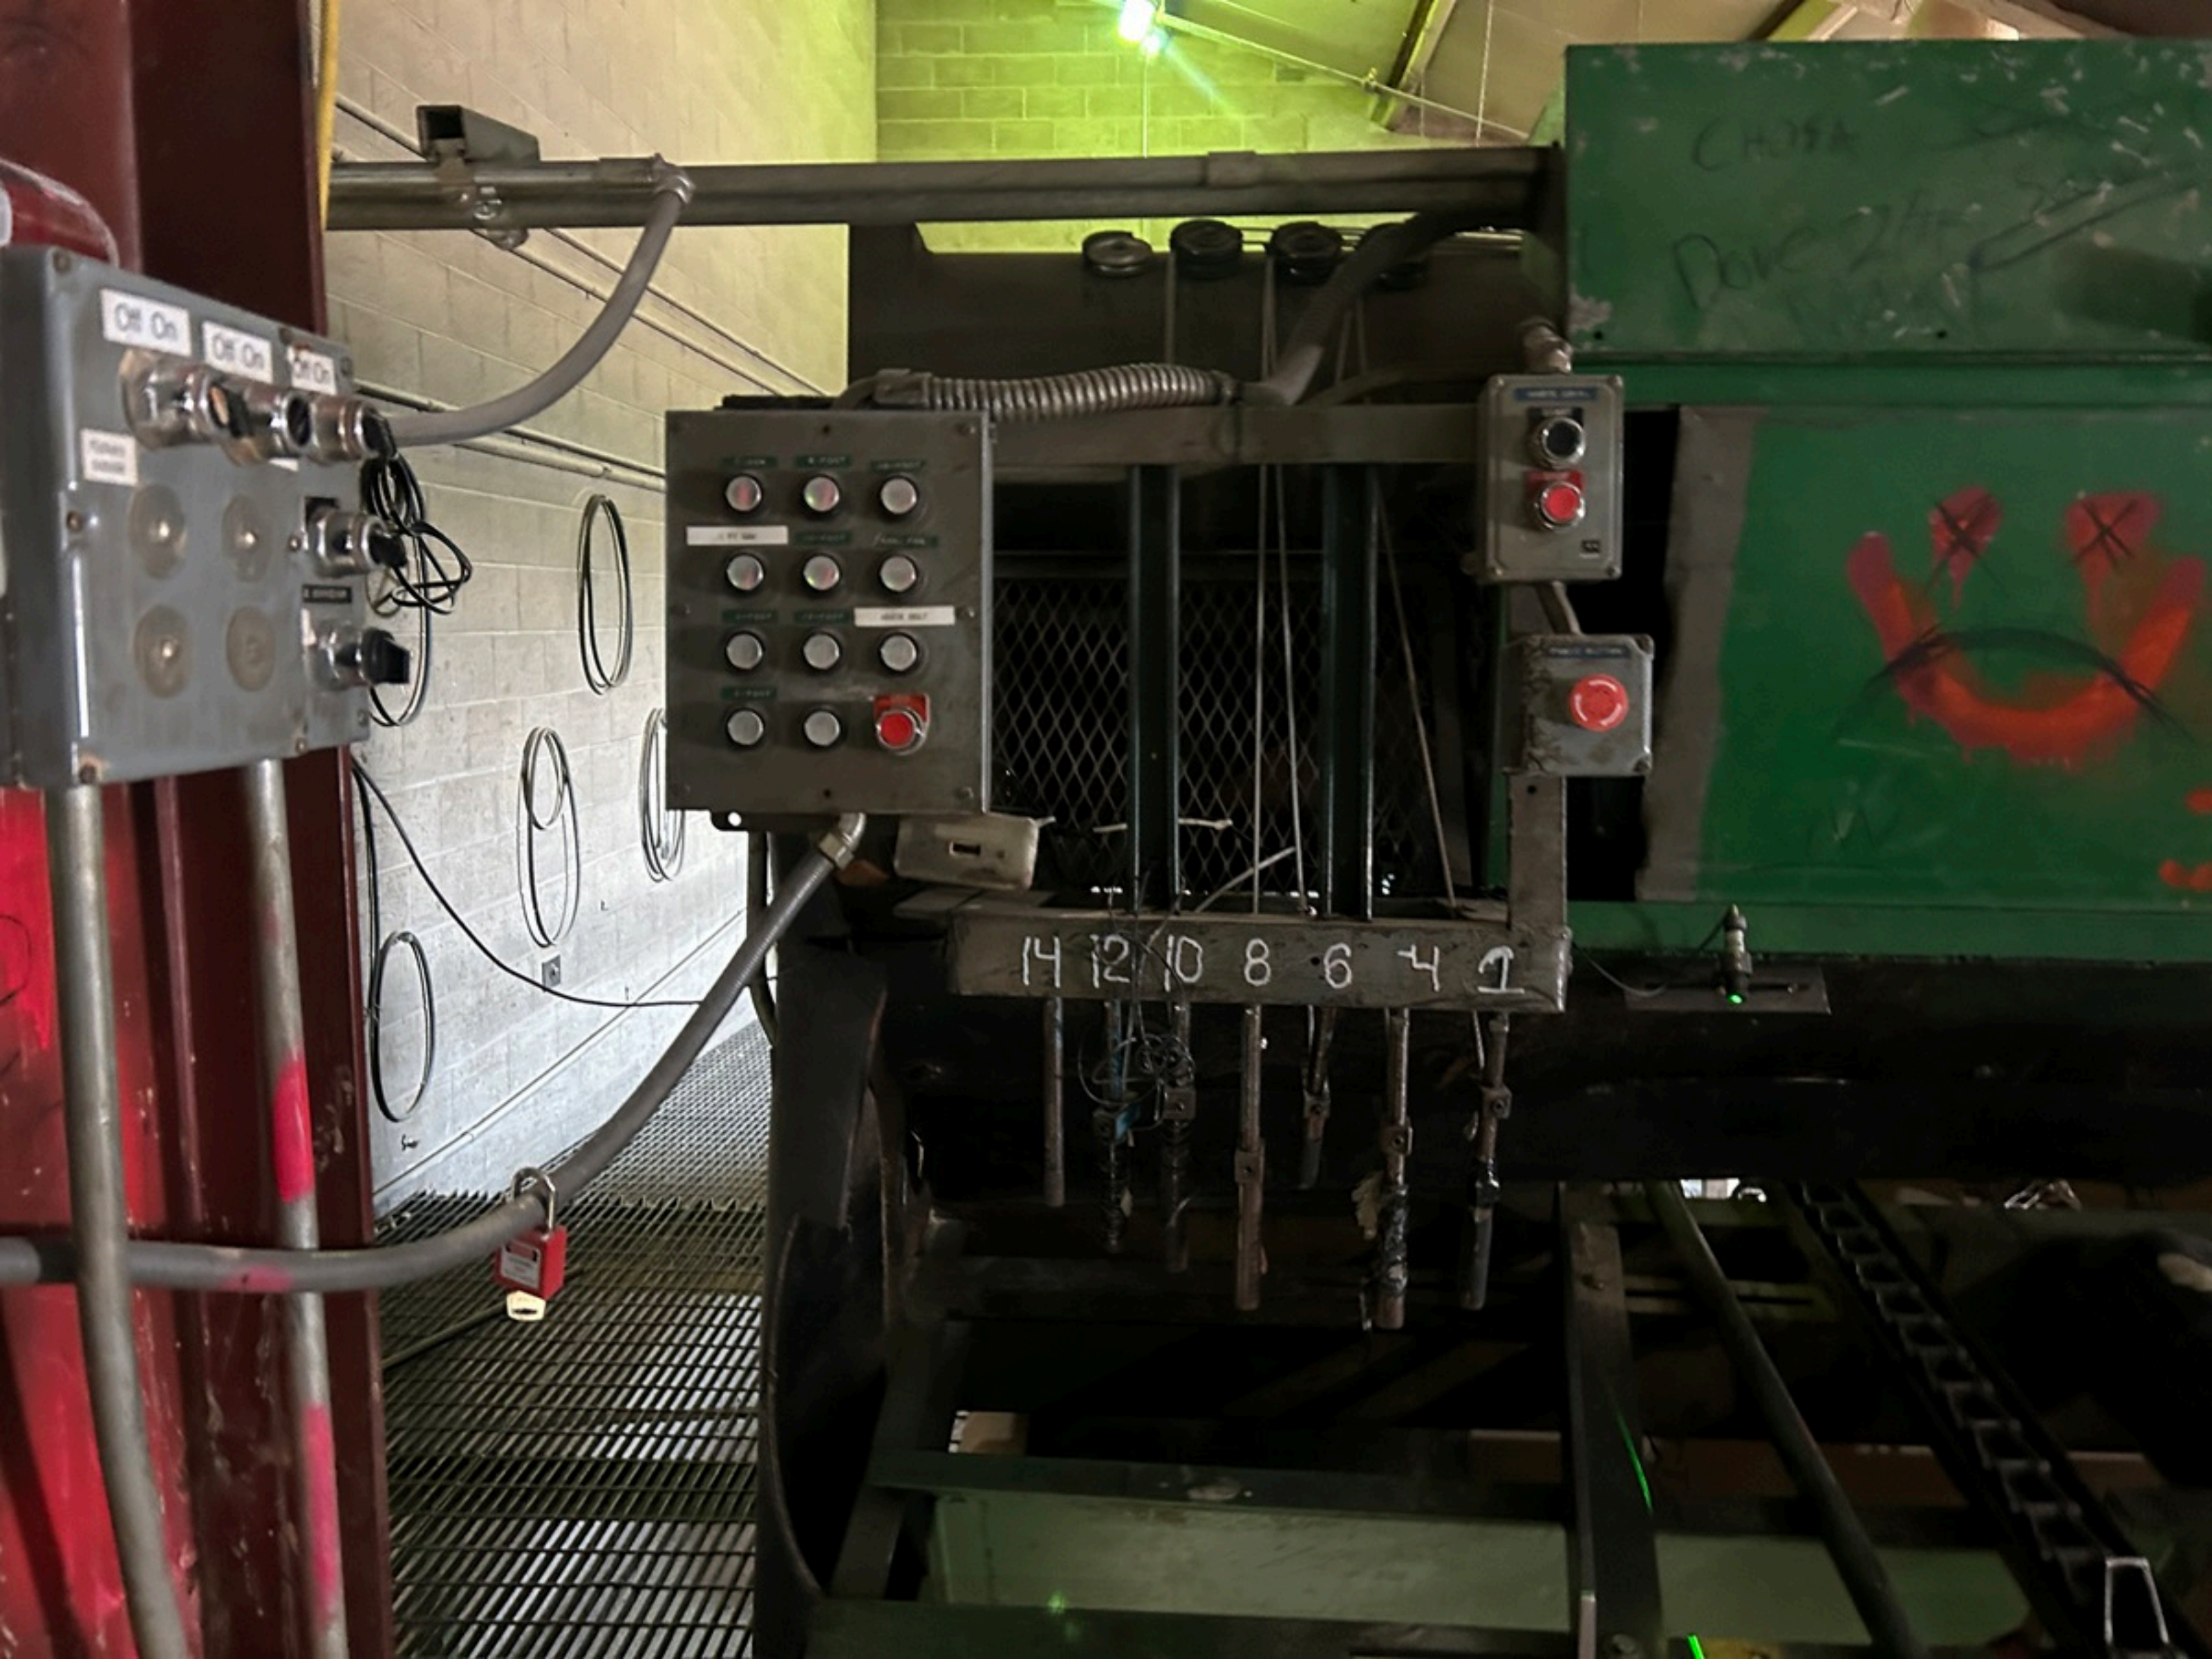

Off On Off On Off On

Control panel with 12 buttons and a red emergency stop button.

14 12 10 8 6 4 2

Green panel with red markings and a red emergency stop button.

Red padlock on a cable.









NOTICE  
DO NOT  
CRAWL

4952

























Cutler-Hammer  
CONTROL PANEL

3

9

15

16

20

PANEL A

26

27

10

17

21

11

5

22

12

18

23

6

7

13

19

24

8

14

25

Handwritten notes on a clipboard attached to the left side of the panel.

Handwritten notes on a clipboard attached to the center panel.

TRANSFER TO EDGER, LH

CONVEYOR UNDER LH CASING

LH ROLLCASE TRIMMER END

VIBRATOR CHIPPER END

VIBRATOR UNDER EDGER

TRANSFER TO TRIMMER

TRIMMER

GREEN CHAIN

Warning label with a lightning bolt symbol.

ANEL A

26

27

28

29

2

23

24











 **DANGER**

Moving parts can crush and cut.  
Follow lockout procedures  
before servicing.

Failure to comply will result in death or serious injury.  
39511-838

 **DANGER**

**ROTATING BLADES AND  
THROWN DEBRIS HAZARD.**  
DO NOT open while chipper is turning.  
DO NOT operate with hood open.  
ALWAYS use clutch lock.  
Follow all lockout procedures  
before servicing.

39511-845

**Knife Clamps must  
be Torqued To A  
Minimum of 500 Ft.  
Lbs. Do not Exceed  
800 Ft. Lbs.**

**NOTICE**  
CHIPPER BEARINGS  
CLEAN AND REPACK CHIPPER  
BEARINGS EVERY ONE THOUSAND  
HOURS OR TWICE YEARLY  
GREASE ZERTS  
ONE SHOT OF GREASE  
EVERY EIGHT HOURS  
REFER TO MANUAL FOR  
PROPER LUBRICATION

 **MORBARK**

To keep your equipment performing at its peak  
use GENUINE MORBARK parts and SERVICE.  
We're here for the Long-haul!  
CALL 1-800-235-8838  
FOR YOUR LOCAL DEALER OR SUPPORT FACILITY  
MORBARK.COM



NOTICE  
CHECK BELT TENSION DAILY  
ALL SHIELDS AND GUARDS  
SHALL BE IN PLACE AT ALL TIMES

DANGER

**BENSHAW**  
ADVANCED CONTROLS & SERVICE

0.00  
0.00  
0.00  
0.00

038  
Small Travel .005 (ok)

STOP  
START  
REVERSE  
FORWARD  
EMERGENCY STOP

WARNING

WARNING























1T

















WARNING  
BE SURE ALL SWITCHES ARE  
KEY IN THE "ON" POSITION BEFORE  
STARTING THE MOTOR.

CHIPPER DISK LOCK

**DANGER**  
Always Use Chipper Disk  
Lock When Changing  
Chipper Knives



SAFETY PRECAUTION  
PLEASE ALWAYS WEAR YOUR SAFETY  
BELT AND HELMET WHEN OPERATING  
THIS MACHINE.

DO NOT REPAIR OR  
MAINTAIN THIS MACHINE  
WHILE IT IS RUNNING.  
ALWAYS USE THE DISK  
LOCK WHEN CHANGING  
KNIVES.

CLEAN AND RE-PACK  
CHIPPER BEARINGS  
EVERY 100 HOURS  
OR TWICE YEARLY.

Chipper  
Maintenance  
Schedule





























10/03/20





**ANCHORSEAL 2**  
HYBRID END SEALER FOR LOGS AND LUMBER

APPLY GENERALLY TO FRESH CUT ENDS  
IT IS VERY IMPORTANT TO APPLY HYBRID SEALER IN A HEAVY COAT - "TO THE DRIP"

READY TO USE PROTECTIVE COATING

WINTER FORMULA  
Cold weather protection

55-101-W

503133554-0

ANCHORSEAL 2  
HYBRID END SEALER FOR LOGS AND LUMBER

ANCHORSEAL 2  
HYBRID END SEALER FOR LOGS AND LUMBER













